



# 930/950 TRAVELING TAIL TRAILER



- Reduce Maintenance Cost and Time with Centralized Grease System
- Easily Accessible from Rear of Trailer at One Location
- Rear Facing Strobe Light

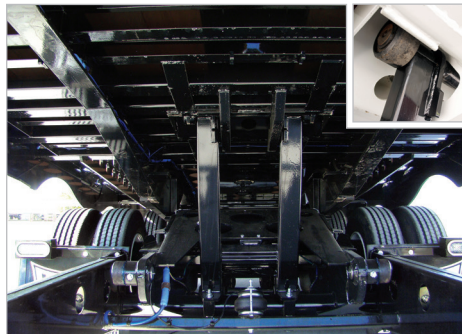

- Stable, Rigid Dock Arm Engages in Pockets Under Tail
- Tail Raises to Match Dock Height up to 62" High (15 Tail)

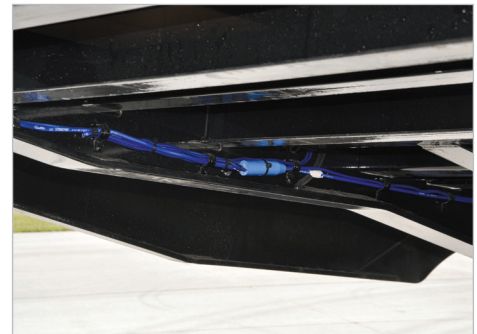

- Grote "Xtreme" Wiring Harness with LED Lighting System
- Grote Supplied Multi-Year Warranty
- Plug 'n Go Modular Design with Double Seal Technology Provides Protection from Moisture and Contaminants



- Low Load Angle on Tail
- Allows for Loading Low Clearance Equipment
- Standard Center Chain Gotcha Chain Slots
- Optional Bolt-on Landoll Steel Traction Plate for Increased Traction



- Enhanced Lighted Control Panel
- One Hydraulic Control to Load and Unload Trailer
- One Hydraulic Control for Winch
- Optional Wireless Remote Control



- Standard 102" Wide Upper Deck Air Ramp
- Low Profile Design for Ease of Loading Upper Deck
- Landoll Traction Plate on Slope and Ramp for Added Safety
- Spring Loaded Ramp Supports, Hex Pivot Shaft with Corrosion Resistant Bearings



**PROVEN SOLUTIONS FOR YOUR HAULING NEEDS!**  
1-800-428-5655 | [www.landoll.com/trailers](http://www.landoll.com/trailers)

# STANDARD & OPTIONAL EQUIPMENT / FEATURES

## Model 930 / 950 E Traveling Tail

S=Standard O=Optional

MODEL 950	50 TON	100,000 lbs.
MODEL 930	35 TON	70,000 lbs.
<b>MAIN FRAME</b>		
- Fabricated 80,000 and 100,000 PSI	S	S
- Four Beam Design	S	S
- Capacity - 70,000 lb. Distributed / 50,000 lb. Concentrated in 10'	S	
- Capacity - 100,000 lb. Distributed / 70,000 lb. Concentrated in 10'		S
<b>KINGPIN SETTING</b>		
- 18" Setting	S	S
- 84" Swing Clearance	S	S
<b>CROSSMEMBERS</b>		
- 8" Centers	S	S
<b>DECK AND FEATURES</b>		
- 102" Wide	S	S
- 90° Slope Drop	S	S
- 38" Deck Height (Loaded)	S	S
- 1 7/8" Nominal Apitong	S	S
- 20" Loaded Ground Clearance	S	S
<b>TAIL</b>		
- 12' (15° Load Angle)		
Model 930 / 950-45-12 (Lower Deck Length 35'3")	S	S
Model 930 / 950-50-12 (Lower Deck Length 38'3")	S	S
- 14' (12° Load Angle)		
Model 930 / 950-48-14 (Lower Deck Length 40'3")	S	S
Model 950-52-14 (Lower Deck Length 42'3")		S
- 15' (11° Load Angle)		
Model 930 / 950-48-15 (Lower Deck Length 38'3")	S	S
Model 930 / 950-51-15 (Lower Deck Length 41'3")	S	S
Model 950-53-15 (Lower Deck Length 43'3")		S
- Flush Center Chain Gotcha Chain Slots	S	S
- Flat Approach Plate with (6) Chain Keyholes	S	S
- Apitong Wood Covered	S	S
- Lifting Capacity - 24,000 lb.	S	S
<b>TIE DOWNS / CHAIN GOTCHAS</b>		
- 2-Way Chain Slots / Gotchas on 16" Centers	S	S
<b>TOOL BOX (UPPER DECK)</b>		
- Non-Weight Bearing Top Opening, Lighted Tool Box	S	S
- Weight Bearing Top Opening, Lighted Tool Box	O	O
- Side Opening Door, Lighted Toolbox	O	O

MODEL 950	50 TON	100,000 lbs.
MODEL 930	35 TON	70,000 lbs.
<b>WINCHES AND ACCESSORIES</b>		
- Upper Deck Worm Gear 12,000 lb. with 85' of 1/2" Cable with Slope Wear Plate	S	S
- Upper Deck 20,000 lb. or 30,000 lb.	O	O
- Lower Deck Mounted Winch Optional - (Removes Upper Deck Ramp)	O	O
<b>SLOPE RAMP</b>		
- 102" Wide Upper Deck Ramp (Air Operated)	S	S
<b>AXLES</b>		
- (2) 25,000 lb. Dual Tire, Oil Bath Bearings, Outboard Brake Drum	S	
- (3) 25,000 lb. Dual Tire, Oil Bath Bearings, Outboard Brake Drum		S
<b>SUSPENSION</b>		
- Dexter L55-25,000 lb Capacity Air Ride with Manual Dump Valve	S	S
<b>BRAKES</b>		
- 12.25x7.5 Full Air / Spring Brakes ABS, 4S2M	S	S
- 16.5x7.5 Full Air / Spring Brakes ABS, 4S2M	O	O
<b>TIRES / RIMS</b>		
- 235/75R 17.5 Double Coin Tires on 17.5x6.75 Tubeless Rims	S	S
- 255/70R 22.5 Double Coin Tires on 22.5x7.5 Tubeless Rims	O	O
- 255/70R 22.5 Michelin Tires on 22.5x7.5 Tubeless Rims	O	O
- All Axles Prepped for Tire Inflation	S	S
- Tire Inflation System	O	O
- Hubodometer	O	O
<b>HYDRAULIC POWER SOURCE</b>		
- Truck Mount Air Shift PTO, Pump and Hydraulics Reservoir	O	O
- Self Contained Hydraulic System Under Deck Mount or Upper Deck	O	O
- Hydraulic Quick Couplers 2,500 PSI - 20 GPM at Controls, 50 GPM Max	S	S
<b>ELECTRICAL</b>		
- 7 Way Receptacle (Electrical)	S	S
- Grote Clear Lens with Chrome Bezel (10-Year Warranty)	S	S
- Grote "Xtreme" Wiring Harness (7-Year Warranty)	S	S
- Slope Mounted Rear Facing Work Lights	O	O
- Prepped for Slope Mounted Work Light Option	S	S
- Center Rear Strobe Light	S	S
- Mud Flap Tail/Turn Lights	S	S
<b>FINISH / COLOR</b>		
- Steel Grit Shot Blast to Bright Metal	S	S
- Zinc-Rich Primer	S	S
- TGIC Polyester Powder Coat	S	S
White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Metallic Gray		
- Galvanizing	O	O
<b>WEIGHT (ESTIMATED)</b>		
- 930-48-12 17,660 lbs. +/- 3%	S	
- 930-51-15 19,250 lbs. +/- 3%	S	
- 950-48-12 20,695 lbs. +/- 3%		S
- 950-51-15 21,750 lbs. +/- 3%		S
<b>MORE OPTIONS AVAILABLE, CONSULT FACTORY</b>		

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.



**CALL 1-800-428-5655**  
REMEMBER: QUALITY IS ALWAYS A BARGIN!

1900 North Street | Marysville, KS 66508 | Phone: 785-562-5381 | Fax: 888-293-6779

SCAN FOR MORE

