

LIGHT DUTY SERIES

C2 Pickup

MAXON®



C2 SPECIFICATIONS

Introducing the all-new C2 just like the liftgates you know, but at significantly reduced cost. The C2 provides direct lifting with level ride and ramp options that increase loadable platform depth.

- C2 liftgates are built with high performance and low maintenance in mind
- Oversized, fully enclosed pump and motor assembly helps ensure increased life and less downtime
- Maintenance-free bearings reduce the need for service

Model No.	Load Area	Ramp	Travel	Weight
-----------	-----------	------	--------	--------

1300 Lbs	Steel Platform				
	C2-60-1342 TP27	55" X 27"	4"	28" to 42"	460 lbs
	C2-60-1342 TP38	55" X 38"	4"		510 lbs
	C2-60-1342 TP42	55" X 42"	7"		535 lbs
	Aluminum Platform				
	C2-60-1342 EA27	55" X 27"	6"	28" to 42"	435 lbs
	C2-60-1342 EA38	55" X 38"	6"		465 lbs
	C2-60-1342 EA48	55" X 48"	6"		495 lbs
	Grip Strut Platform				
	C2-60-1342 GS27	55" X 27"	4"	28" to 42"	460 lbs
Bar Grate Platform					
C2-60-1342 BG27	55" X 27"	4"	28" to 42"	460 lbs	
1500 Lbs	Steel Platform				
	C2-60-1542 TP27	55" X 27"	4"	28" to 42"	460 lbs
	C2-60-1542 TP38	55" X 38"	4"		510 lbs
	C2-60-1542 TP42	55" X 42"	7"		535 lbs
	Aluminum Platform				
	C2-60-1542 EA27	55" X 27"	6"	28" to 42"	435lbs
	C2-60-1542 EA38	55" X 38"	6"		465 lbs
	C2-60-1542 EA48	55" X 48"	6"		495 lbs
	Grip Strut Platform				
	C2-60-1542 GS27	55" X 27"	4"	28" to 42"	460 lbs
Bar Grate Platform					
C2-60-1542 BG27	55" X 27"	4"	28" to 42"	460 lbs	



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

LIGHT DUTY SERIES

C2 Pickup

MAXON®

C2 standard features

- Dual hydraulic lifting cylinders
- Maintenance-free components
- Protected / recessed main control with time-out feature
- Steel or aluminum platforms
- Fully-enclosed hydraulic system
- Patent Pending Pre-punched Holes for Camera/Sensors

Optional features

- Hot Dip Galvanized Finish (at no additional charge)
- Light Kits
- Remote Pendant Control
- Rubber Platform Protection Bumpers
- Tire Rack Kit



Enclosed Pump & Motor Assembly

The C2 pump and motor assembly is fully enclosed and shielded from the elements.



Main Control with Time-Out Feature

A timed toggle control prevents unauthorized use. It automatically deactivates 90 seconds after operation.



Maintenance Free Pins & Bushings

Maintenance free pins and bushings allow for years of maintenance free service.



Power Cable with Full Length Ground

The dedicated ground cable helps to get the maximum lifespan out of the vehicles battery.

Distributed by:

M-211-0722




Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

TUK-A-WAY® SERIES

The TE-20 Series

MAXON®

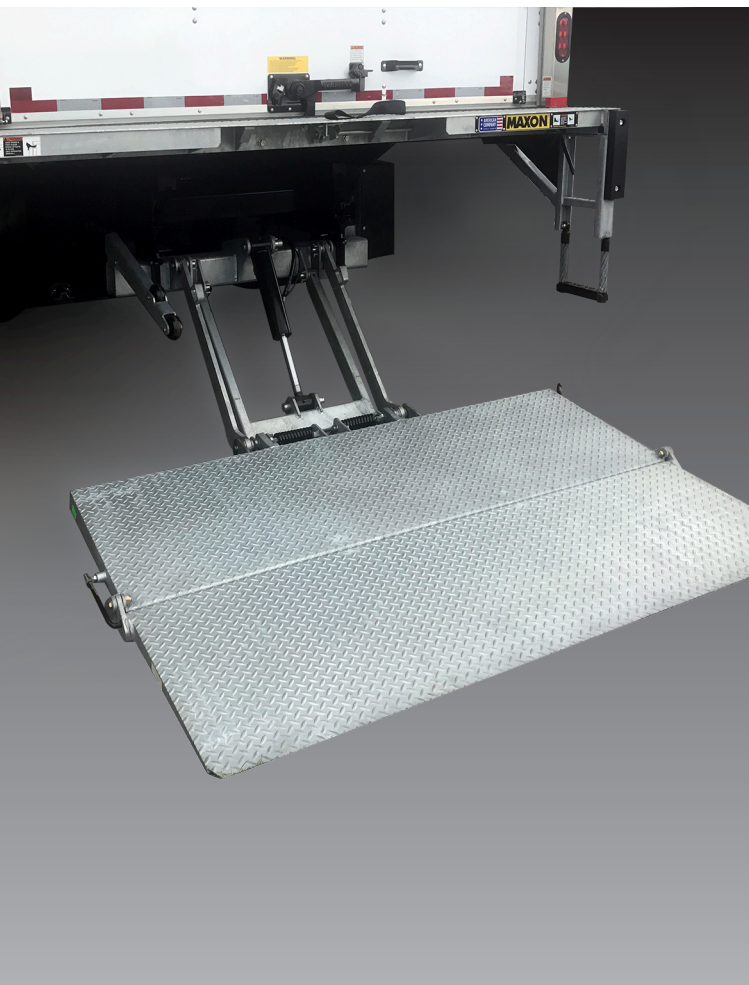



TE-20 SPECIFICATIONS

The TE-20 Series of Tuk-A-Way® liftgates are the economical choice for general purpose applications requiring 2,000 lbs. lifting capacity. The minimum laden bed height of 36" makes the TE-20 an ideal solution for low bed height applications.

- Center Arm Design
- SmartSpace™ - gap between extension plate and platform that mitigates a potential pinch point
- Standard Ride
- Low Bed Height Compatible
- 38 Foot Charge Line Kit with a Circuit Breaker

MODEL CAPACITY	WEDGE PLATFORM SIZE	TOTAL WEIGHT	BED HEIGHT
TE-20 (2,000 Lbs.)	36" x 80" (ST) 40" x 80" (AL)	550 lbs. to 585 lbs.	42" Min. w/Body Laden 54" Max. w/Body Unladen
TE-20L (2,000 Lbs.)			36" Min. w/Body Laden 44" Max. w/Body Unladen

ST = Steel
AL = Aluminum

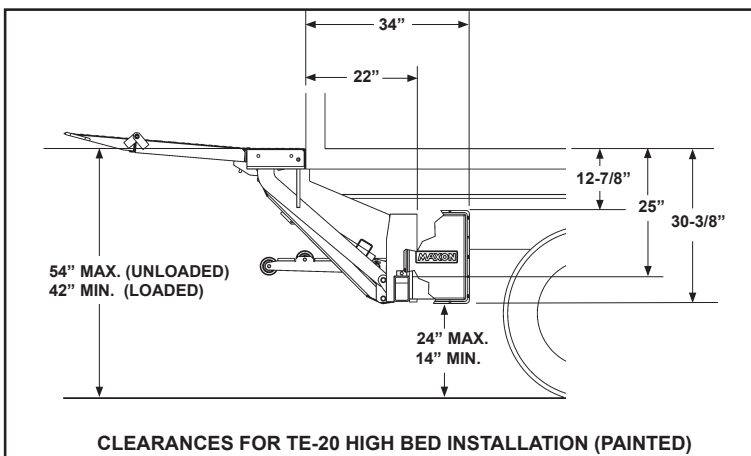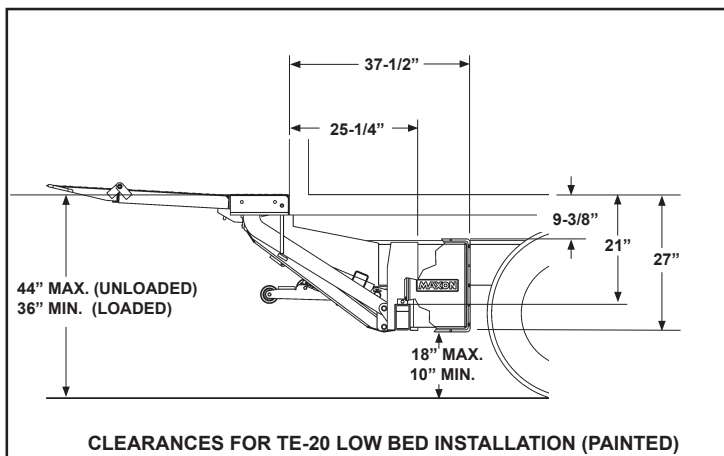

Lift Dimensions and Mounting Requirements

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

TUK-A-WAY® SERIES


The TE-20 Series

MAXON®

Optional Features

- Dual Cart Stops
- Bolt-on steps
- Heavy-Duty Dock Bumpers
- Bumper Pads
- MAX ECU® (Electrical Control Unit)
- Street Side Controls
- Power Down
- Galvanized Finish

Loadable Platform Space with Cart Stops Deployed

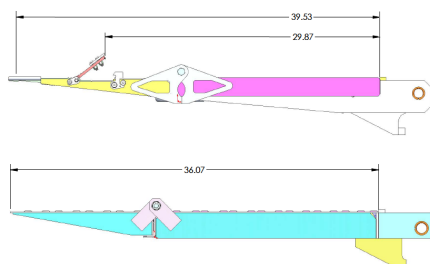


Distributed by:

M225-0523



Large Wedge-Type Platform Design

The TE-20 features large (36"/40"x 80") wedge-type platforms that are available in Steel or Aluminum configurations. The wedge design allows for the smooth transition of load on and off the platform.

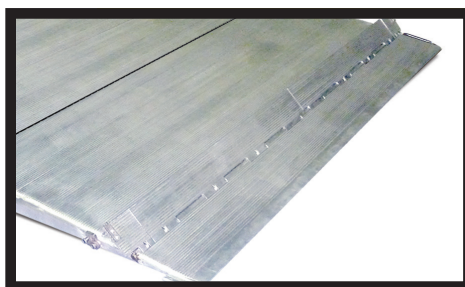

Dual Cart Stop Options

The Aluminum platforms feature dual cart stops.



Optional Bolt-On Steps and Extension Plate

The steps and extension plates were strategically designed to bolt-on (option) in order to avoid welding on the gate that would affect the factory paint or galvanized finish. The steps were also designed as an integral part of the gate that would easily allow for them to be exchanged in case of dock damage.



Grease Fittings Standard

The TE-20 features grease fittings at all critical rotation points.



MAXPRO® Paint or GALVANIZED Finish

This patented, Maxon exclusive paint process has a tough polyurea top coat and an AL rich primer that combat corrosion and keep the liftgate looking like new for many years. For even more corrosion protection, the TE-20 is also available in a galvanized finish.




Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

TUK-A-WAY® SERIES

The MXT-25 & MXT-33 Series


MAXON®

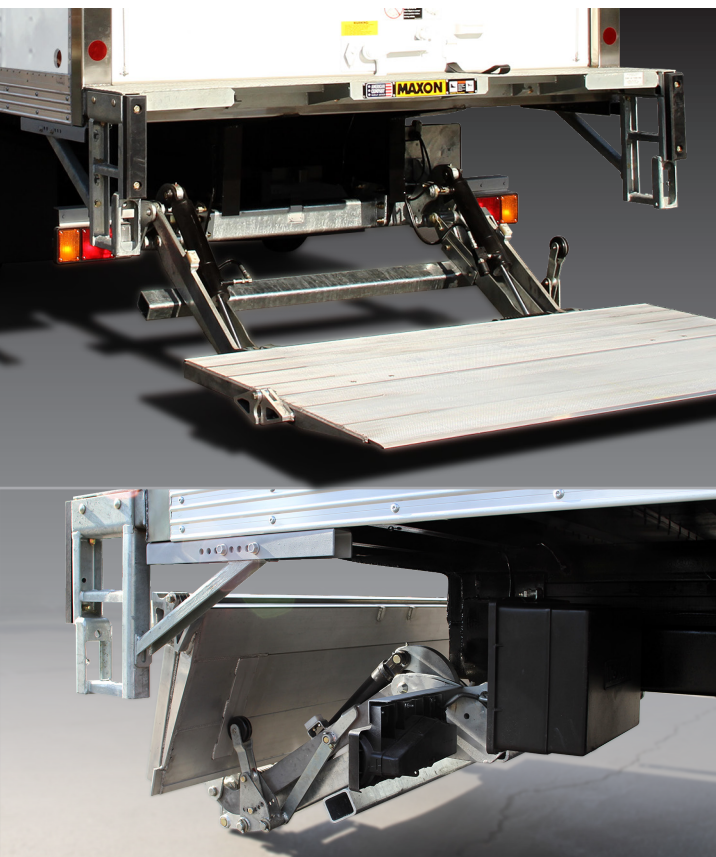

MXT-25 & MXT-33 SPECIFICATIONS

MAXON's MXT-25 & MXT-33 liftgate models combine low bedheight application with a premium level-ramping ride feature

- Level-ramping ride platform travel pattern
- Steel, Steel/Aluminum as well as all Aluminum platforms
- Bolt-on extension plate and steps
- Hydraulic locking
- Grease fittings at all critical rotation points
- All steel components come hot-dip galvanized **STANDARD!**

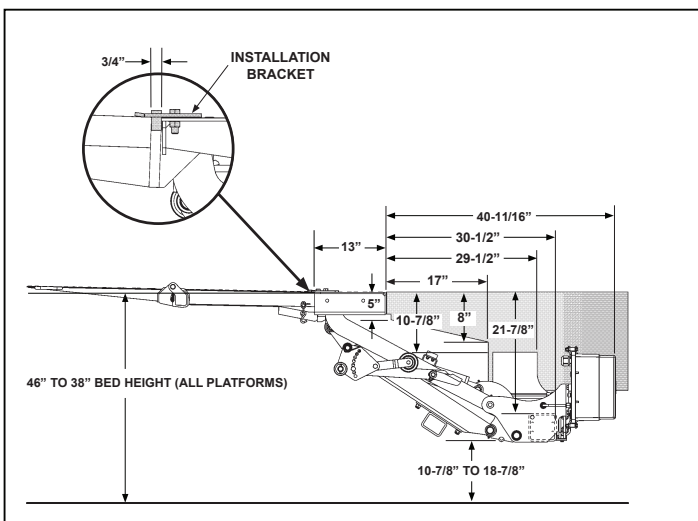

Lift Dimensions and Mounting Requirements
Refer to install manual for MXT-25 & MXT-33

MODEL	CAPACITY	PLATFORM SIZE	TOTAL WEIGHT	BED HEIGHT
MXT-25	2,500 Lbs.	80" x 48" (24+24)	990 Lbs - ST/ST	38" Min. Laden
MXT-33	3,300 Lbs.		945 Lbs - ST/AL 900 Lbs - AL/AL	46" Max. Unladen

"ST" - Steel
"AL" - Aluminum

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

TUK-A-WAY® SERIES

The MXT-25 & MXT-33 Series

MAXON®


Standard Features

- Level-ramping ride
- Galvanized steel components
- MAX ECU (Electrical Control Unit)
- MAX GRIP® AL platform surface treatment
- Cycle counter
- Dual cylinder hydraulic system
- Lock valve for automatic stowing


Optional Features

- Hand held control
- Dual controls
- Cab Cut-off switch
- Power down
- Dual Cart stops
- Multiple step options
- License plate mount kit
- 24 Volt configuration

Loadable Platform Space with Cart Stops Deployed

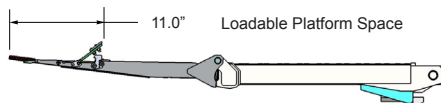


Distributed by:

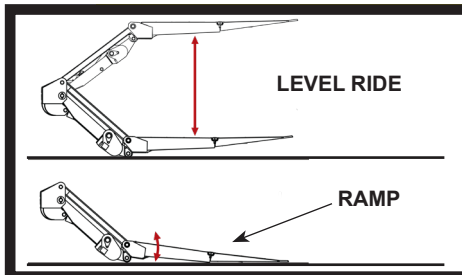

Level-Ramping Ride Platform

The MXT features a premium level-ramping ride pattern. It is equipped with a brand new knuckling mechanism that works in gravity mode.

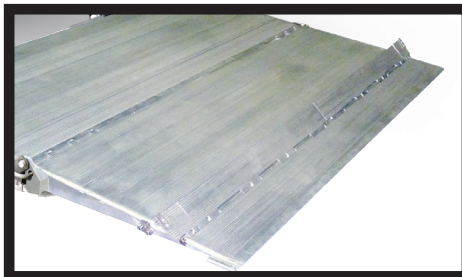

Wedge-Type Platform Design

The MXT features a 48" x 80" wedge-type steel, steel/aluminum, or aluminum/aluminum platform. The ST/AL and AL/AL platforms come optional with dual cart stops. The wedge design allows smooth transition of load on and off the platform.



Twin Cylinder Design

The MXT features a twin cylinder, mid-arm design resulting in great performance and stability.



Hydraulic Locking

The MXT features a hydraulic lock valve that takes operator involvement out of the equation. As soon as the control button is released the hydraulic system is always securely locked.



Bolt-On Steps & Extension Plate

The steps and extension plates were strategically designed to bolt-on in order to avoid welding on the gate that would affect the factory paint. The steps were also designed as an integral part of the gate that would easily allow for them to be exchanged in case of dock damage.



Fully Galvanized - STANDARD

Galvanization is the process by which zinc is coated over corrosive (easily rusted) metals. The process of galvanizing not only protects from corrosion of various 'soft metals' but also adds strength to the original, uncoated metal

M-258-1021



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

RAILIFT™ SERIES

The DMD Series


MAXON®



DMD GENERATION 2.0 SPECIFICATIONS

The DMD is a medium-duty, fully hydraulic direct lift that utilizes a twin cylinder design to ensure efficient performance

- The DMD Generation 2.0 features Aluminum columns paired with galvanized steel runners
- The DMD utilizes a unique twin cylinder lifting design that eliminates the maintenance costs associated with other chain or cable equipped liftgates
- The pump and motor assembly is housed within the liftgate's main structural enclosure
- The DMD features fully sealed switches and harnesses to protect them against corrosion
- All aluminum platforms
- MAX GRIP® and Cycle Counter standard

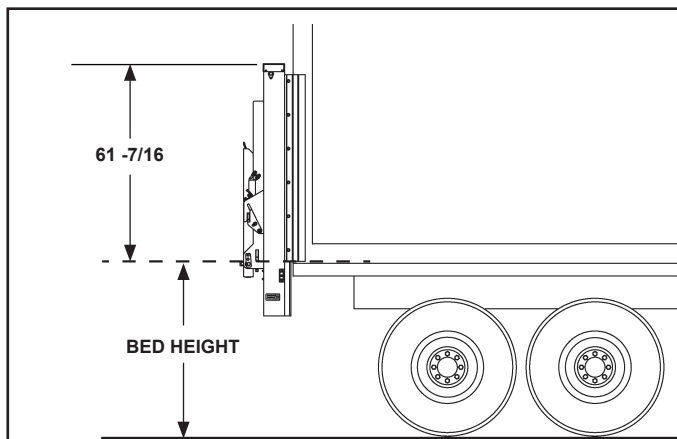

Load-Over Bedheights			
Two Piece Platform Plus 6" Ramp	Min Bed Height for loading over	Two Piece Platform Plus 12" Ramp	Min Bed Height for loading over
48" (30+18) + 6" fixed ramp	32"	42" (30+12) +12" fixed ramp	32"
54" (33+21) + 6" fixed ramp	35"	48" (33+15) +12" fixed ramp	35"
60" (36+24) + 6" fixed ramp	38"	54" (36+18) +12" fixed ramp	38"
66" (39+27) + 6" fixed ramp	41"	60" (39+21) +12" fixed ramp	41"
72" (42+30) + 6" fixed ramp	44"	66" (42+24) +12" fixed ramp	44"

NOTE: Please review DMD liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.

MODEL CAPACITY	BODY WIDTH	PLATFORM SIZE*	TOTAL WEIGHT	BED HEIGHT
DMD 18 1,800 LBS	96" 102"	One-piece platforms: 36", 42", 48" + 6" or 12"*** Fixed Ramp with optional Single or Dual Cart Stops or 9" Aluminum Retention Ramp or 39", 45" + 9" Fixed Ramp with Single or Dual Cart Stops	635 to 730 Lbs.	30" - 54" *****
DMD 22 2,200 LBS.		Two-piece platforms: 48" (30+18), 54" (33+21), 60" (36+24), 66" (39+27), 72" (42+30) + 6" fixed Ramp with optional Dual or Single Cart Stops		
DMD 33 3,300 LBS.		or 42" (30+12), 48" (33+15), 54" (36+18), 60" (39+21), 66" (42+24) +12" fixed ramp with optional Dual or Single Cart Stops		
DMD 18** 1,800 LBS Power Closer		One-piece platforms: 48", 54", 60", 66", 72" +12" fixed ramp with optional Single or Dual Cart Stops or 9" Aluminum Retention Ramp**** or 51", 57", 63", 69", 75" +9" Fixed Ramp with Single or Dual Cart Stops	675 to 745 Lbs.	
DMD 22** 2,200 LBS. Power Closer		Two-piece platforms: 48" (30+18), 54" (33+21), 60" (36+24), 66" (39+27), 72" (42+30) + 6" fixed ramp with optional Single or Dual Cart Stops or 42" (30+12), 48" (33+15), 54" (36+18), 60" (39+21), 66" (42+24) +12" fixed ramp with optional Dual or Single Cart Stops		
DMD 33** 3,300 LBS. Power Closer				

* Platform width for 96" body: 90"; 102" body: 96"

** Units with hydraulic power closer have 1.25" less unobstructed opening.

*** 12" Fixed ramp only available on 36" and 42" platforms

**** Not on 48"

***** Note that maximum bed height of above bed models is being reduced by the amount of above floor travel



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

RAILIFT™ SERIES

The DMD Series

MAXON®

Optional Equipment


- Domestic or Foreign Chassis Light Set Ups
- Cab Cut Off Switch
- Handheld Control
- Additional Street Side Control
- Backup Alarm Installation Kit
- Platform Hydraulic Power Closure*
- Above Bed Travel **

* large, single-piece platforms come with power closure standard; on other configurations power closure is optional


** Note that maximum bed height of above bed models is being reduced by the amount of above floor travel

Loadable Platform Space with Cart Stops Deployed


NEW DMD ONE PC PLATFORM WITH SINGLE OR DUAL CART STOP & 6" FIXED RAMP

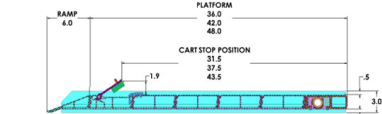


NEW DMD ONE PC PLATFORM WITH SINGLE OR DUAL CART STOP ON 9" RAMP




NEW DMD ONE PC PLATFORM WITH SINGLE OR DUAL CART STOP ON 12" RAMP

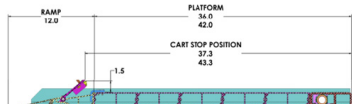


NEW DMD TWO PC PLATFORM WITH SINGLE OR DUAL CART STOP ON FLUPOVER WITH 6" FIXED RAMP

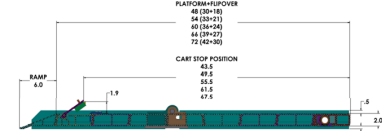

NEW DMD TWO PC PLATFORM WITH SINGLE OR DUAL CART STOP ON 12" RAMP

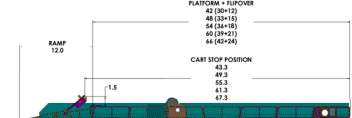

Distributed by:

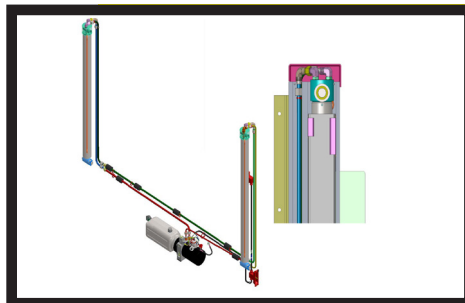

Effective Hydraulic System

Two direct-acting lifting cylinders. The master cylinder drives the second cylinder. The ultimate goal was to develop the most reliable medium-duty gate with the least need for maintenance



Aluminum Columns / Galvanized Runners

The DMD 2.0 features extruded Aluminum columns and galvanized steel runners. This combination results in overall weight reduction, enhanced corrosion resistance, and increased performance.



Pump and Motor Housing Options

The DMD's main pump housing is available in four different light configurations and also features a license plate holder and an optional back-up alarm install kit



Corrosion Resistant Electrical System

The DMD features fully sealed switches and harnesses to protect them against corrosion



Aluminum Platform w/ Cart Stop Option

The DMD features an all-Aluminum platform with optional single - or dual cart stops

M198-1121




Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

LIGHT DUTY SERIES

C2 Service Body

MAXON®

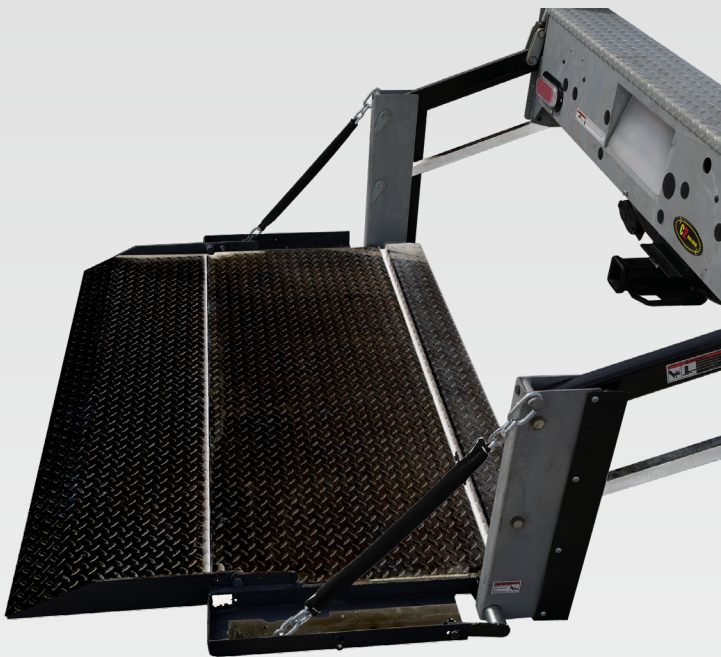

C2 SPECIFICATIONS

Introducing the all-new C2 just like the liftgates you know, but at significantly reduced cost. The C2 provides direct lifting with level ride and ramp options that increase loadable platform depth.

- C2 liftgates are built with high performance and low maintenance in mind
- Oversized, fully enclosed pump and motor assembly helps ensure increased life and less downtime
- Maintenance-free bearings reduce the need for service

	Model No.	Load Area	Ramp	Travel	Weight
1300 lbs	Steel Platform				
	C2-54-1342 TP27	49" X 27"	4"	28" to 42"	475 lbs
	C2-54-1342 TP38	49" X 38"			
	C2-54-1342 TP42	49" X 42"	7"		
	Aluminum Platform				
	C2-54-1342 EA27	49" X 27"	6"	28" to 42"	430 lbs
	C2-54-1342 EA38	49" X 38"			
	C2-54-1342 EA48	49" X 48"			
	Grip Strut Platform				
	C2-54-1342 GS27	50" X 27"	4"	28" to 42"	475 lbs
Bar Grate Platform					
C2-54-1342 BG27	50" X 27"	4"	28" to 42"	475 lbs	
1600 lbs	Steel Platform				
	C2-54-1642 TP27	49" X 27"	4"	28" to 42"	475 lbs
	C2-54-1642 TP38	49" X 38"			
	C2-54-1642 TP42	49" X 42"	7"		
	Aluminum Platform				
	C2-54-1642 EA27	49" X 27"	6"	28" to 42"	430 lbs
	C2-54-1642 EA38	49" X 38"			
	C2-54-1642 EA48	49" X 48"			
	Grip Strut Platform				
	C2-54-1642 GS27	50" X 27"	4"	28" to 42"	475 lbs
Bar Grate Platform					
C2-54-1642 BG27	50" X 27"	4"	28" to 42"	475 lbs	



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

LIGHT DUTY SERIES

C2 Service Body

MAXON®

C2 standard features

- Dual hydraulic lifting cylinders
- Maintenance-free components
- Protected / recessed main control with time-out feature
- Steel or aluminum platforms
- Fully-enclosed hydraulic system
- Patent Pending Pre-punched Holes for Camera/Sensors
- Gravity down only

Optional features

- Hot Dip Galvanized Finish (at no additional charge)
- Light Kits
- Remote Pendant Control
- Rubber Platform Protection Bumpers
- Tire Rack Kit



Enclosed Pump & Motor Assembly

The C2 pump and motor assembly is fully enclosed and shielded from the elements.



Main Control with Time-Out Feature

A timed toggle control prevents unauthorized use. It automatically deactivates 90 seconds after operation.



Maintenance Free Pins & Bushings

Maintenance free pins and bushings allow for years of maintenance free service.



Power Cable with Full Length Ground

The dedicated ground cable helps to get the maximum lifespan out of the vehicles battery.

Distributed by:

M-212-0921



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

TUK-A-WAY® SERIES

The GPT-25, GPT-3, GPT-4, GPT-5 Series


MAXON®



GPT SPECIFICATIONS

The GPT series Tuk-A-Way is the #1 selling liftgate series in the world. The *newly updated GPT* now offers a bolt-on extension plate and steps (with and w/o lights). The large aluminum platform makes it ideal for almost every application including large carts or pallets. The Level Ride design keeps the driver and cargo safe and the lightweight aluminum finish will look great for years to come.

- Extruded all Aluminum 60"D X 80"W lightweight platform provides ample size without the increased weight of older steel designs
- Recessed hinge design provides flat loading surface over entire width of platform
- Bolt-on extension plate and steps
- Potted toggle switch
- Power down and power tilt
- MAX GRIP® and Cycle Counter standard
- **Galvanized Finish – STANDARD!**

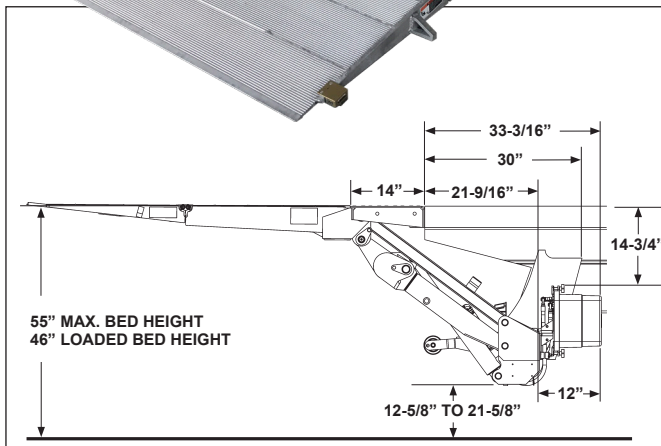

GPT Lift Dimensions and Mounting Requirements

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.

MODEL CAPACITY	OVERALL WEIGHT	PLATFORM SIZE	BED HEIGHT
GPT-25 (2500 Lbs.)	(1105 LBS.)	60" X 80"	46" Laden 55" Unladen
GPT-3 (3000 Lbs.)	(1115 LBS.)		
GPT-4 (4000 Lbs.)	(1130 LBS.)		
GPT-5 (5000 Lbs.)	(1140 LBS.)		



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

TUK-A-WAY® SERIES

The GPT-25, GPT-3, GPT-4, GPT-5 Series

MAXON®

Standard Equipment

- **Galvanized Standard**
- SmartSpace™
- Bolt-on Step & Extension Plate (note: can also be welded to the body)
- Extruded All Aluminum Platform
- Power Down & Power Tilt
- Hydraulic Lock Valve
- Recessed Platform Hinge
- Greasable Pins with Zerk Fittings on All Major Pivot Points
- 14" Long Rubber or 13.5" Plastic Dock Bumper
- MAX GRIP® and Cycle Counter

Optional Features

- 2-Step Bolt-On HD Dock Bumpers w/ Light Cut Outs
- Flexible Cable Steps
- Automatic Cart Stops (Single or Dual)
- MAX ECU® (Electrical Control Unit)
- Cab Cut Off Switch
- Hand Held Remote
- Max On-Lok® (Dock Lock Receiver-by Special Order Request)
- FMVSS and CMVSS Certified Underride
- Flashing Lights



SmartSpace

Maxon has added a gap (SmartSpace) between the liftgate and the extension plate. This feature makes liftgates more efficient and safe to use.



Bolt-On Extension Plate and Steps


Bolting on the extension plate and steps, versus the current practice of welding, has two crucial advantages: it overcomes corrosion issues - induced by welding and repainting and it simplifies installation.



Aluminum Platform MAX GRIP® STANDARD

Lightweight aluminum platform design with recessed hinges provides a flat loading surface over entire width of platform. The platform features MAXGRIP® (knurled platform surface) and dual assist torsion springs that minimize the opening and closing force.

Loadable Platform Space with Cart Stops Deployed

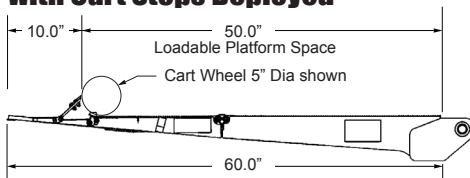

Max On-Lok®

By special order request (SOR) all GPTs can be ordered with the Max On-Lok® kit which makes them compatible with the most common vehicle dock restraint systems.

Distributed by:



Fully Galvanized - STANDARD

Galvanization is the process by which zinc is coated over corrosive (easily rusted) metals. The process of galvanizing not only protects from corrosion of various 'soft metals' but also adds strength to the original, uncoated metal

M-188-0322




Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com

TUK-A-WAY® SERIES

The TE-25/TE-30 Series


MAXON®

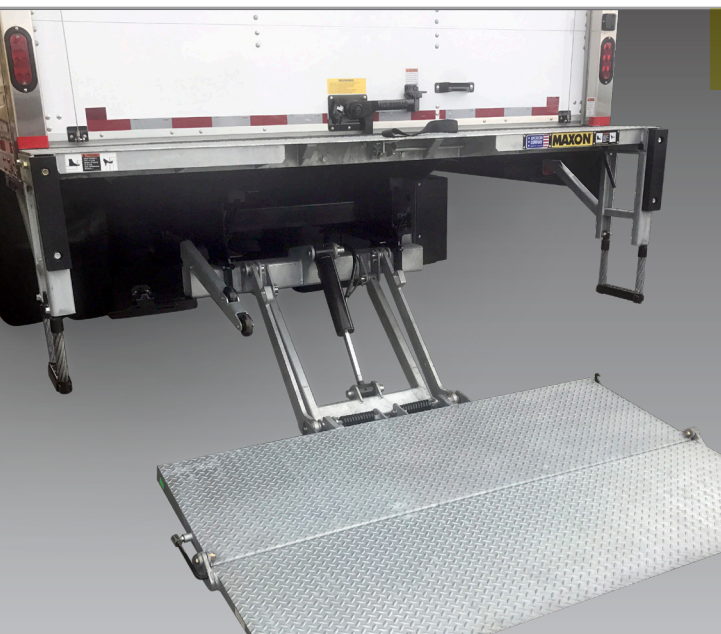


TE-25/TE-30 SPECIFICATIONS

MAXON's brand new TE-25/TE-30 liftgate models have taken "standard" to a whole new level. The 2,500 lbs or 3,000 lbs, medium-duty, Tuk-A-Ways deliver premium features in a standard tuk

- Powerful liftgate in an economic package
- SmartSpace™ - gap between extension plate and platform that mitigates a potential pinch point
- Steel or Aluminum platforms
- Painted or optional galvanized
- Galvanized versions feature bolt-on mount plates
- Weld-on as well as bolt-on step options
- Low bedheight versions
- Grease fittings at all critical rotation points

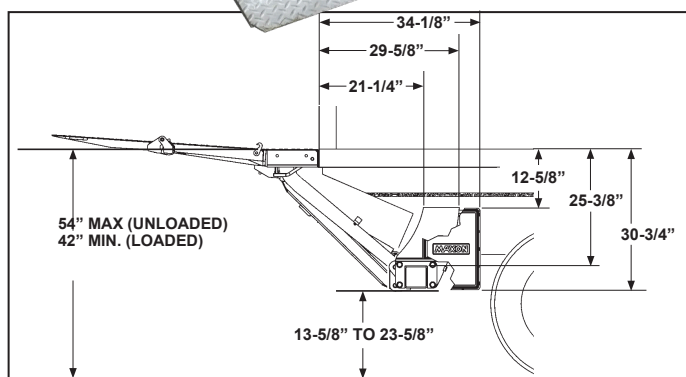

TE-25/TE-30 Lift Dimensions and Mounting Requirements

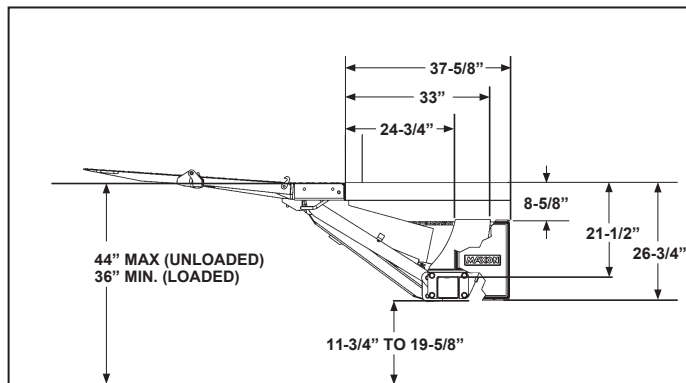

TE-25L/TE-30L Lift Dimensions and Mounting Requirements

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fit.

ST = Steel
AL = Aluminum

MODEL CAPACITY	PLATFORM SIZE	TOTAL WEIGHT	BED HEIGHT
TE-25 (2,500 Lbs.)	36" x 80" (ST)	555 lbs. to 655 lbs.	42" Min. w/Body Laden 54" Max. w/Body Unladen
TE-30 (3,000 Lbs.)	48" x 80" (ST) 48" x 80" (AL/AL) 52" x 80" (AL/AL)		
TE-25L (2,500 Lbs.)	36" x 80" (ST)	585 lbs. to 685 lbs.	36" Min. w/Body Laden 44" Max. w/Body Unladen
TE-30L (3,000 Lbs.)	48" x 80" (ST)		38" Min. w/Body Laden 44" Max. w/Body Unladen
	48" x 80" (AL/AL)		38" Min. w/Body Laden 44" Max. w/Body Unladen



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713 www.maxonlift.com

TUK-A-WAY® SERIES


The TE-25/TE-30 Series

MAXON®

Optional Features

- Bolt-on steps
- Hand held control
- MAX ECU® (Electrical Control Unit)
- Cab Cut-off switch
- Power down
- Dual Cart stops
- Galvanized finish

Loadable Platform Space with Cart Stops Deployed

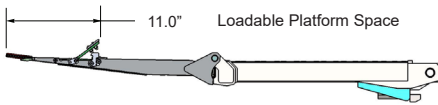


Distributed by:

M-220-0423



Large Wedge-Type Platform Design

The TE-25/TE-30 features large (36"/48"/52" x 80") wedge-type platforms that are available in Steel or Aluminum/Aluminum configurations. The wedge design allows for the smooth transition of load on and off the platform.

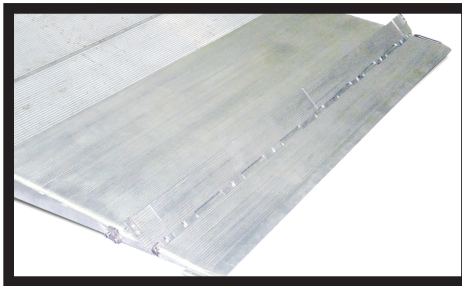

Dual Cart Stop Options

The Aluminum/Aluminum platforms feature dual cart stops.



Optional Bolt-On Steps and Extension Plate

The steps and extension plates were strategically designed to bolt-on (option) in order to avoid welding on the gate that would affect the factory paint or galvanized finish. The steps were also designed as an integral part of the gate that would easily allow for them to be exchanged in case of dock damage.



Grease Fittings Standard

The TE-25/TE-30 feature grease fittings at all critical rotation points.



MAXPRO® Paint or GALVANIZED Finish

This patented, Maxon exclusive paint process has a tough polyurea top coat and an AL rich primer that combat corrosion and keep the liftgate looking like new. For even more corrosion protection, the TE-25/TE30 are also available in a galvanized finish.



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713 www.maxonlift.com

TUK-A-WAY® SERIES

The TE-33 Series


MAXON®



TE-33 SPECIFICATIONS

MAXON's TE-33 liftgate model has taken "standard" to a whole new level. The 3,300 lb, medium-duty, Tuk-A-Way® delivers premium features in a standard tuk.

- Steel or Aluminum platforms
- SmartSpace™ - gap between extension plate and platform that mitigates a potential pinch point
- Bolted-on extension plate and steps
- Hydraulic locking
- Grease fittings at all critical rotation points
- Low bed height as well as walk ramp ready models available

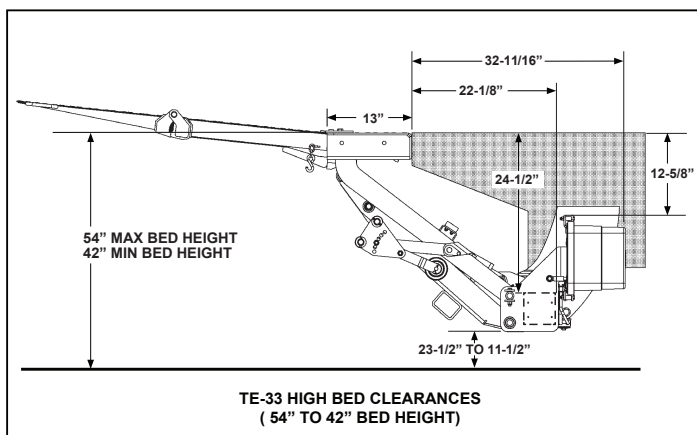

Lift Dimensions and Mounting Requirements
Refer to install manual for TE-33 L

MODEL	CAPACITY	PLATFORM SIZE	TOTAL WEIGHT	BED HEIGHT
TE-33	3,300 Lbs.	48" x 84" ST, AL/AL	990 Lbs - ST 900 AL/AL	42" Min. Laden
		52" x 84" ST, AL/AL	1,020 Lbs - ST 930 AL/AL	54" Max. Unladen
TE-33 L		48" x 84" ST, AL/AL	990 Lbs - ST 900 AL/AL	38" Min. Laden 44" Max. Unladen
		52" x 84" ST, AL/AL	1,020 Lbs - ST 930 AL/AL	40" Min. Laden 44" Max. Unladen
TE-33 WR		48" x 84" ST, AL/AL	990 Lbs - ST 900 AL/AL	44" Min. Laden 54" Max. Unladen
		52" x 84" ST, AL/AL	1,020 Lbs - ST 930 AL/AL	46" Min. Laden 54" Max. Unladen

"L" - Low bed height models
 "WR" - Walk ramp models
 "ST" - Steel
 "AL" - Aluminum

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
 800.227.4116 Fax 888.771.7713, www.maxonlift.com

TUK-A-WAY® SERIES



The TE-33 Series

MAXON®

Optional Features

- Hand held control
- MAX ECU® (Electrical Control Unit)
- Cab Cut-off
- Power down
- Dual Cart stops
- Galvanized finish

Loadable Platform Space with Cart Stops Deployed

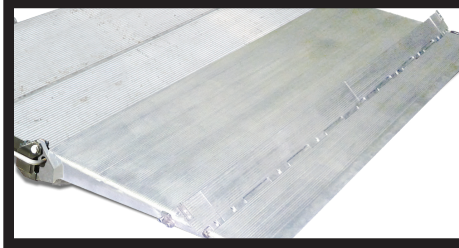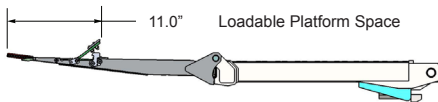

Large Wedge-Type Platform Design

The TE-33 features large 48" x 84" and 52" x 84" wedge-type steel or aluminum/aluminum platforms. The AL/AL platforms come optional with dual cart stops. The wedge design allows smooth transition of load on and off the platform.



Twin Cylinder Design

The TE-33 features a twin cylinder, mid-arm design resulting in great performance and stability.



Hydraulic Locking

The TE-33 features a hydraulic lock valve that takes operator involvement out of the equation. As soon as the control button is released the gate is always securely locked.



Bolt-On Steps & Extension Plate

The steps and extension plates were strategically designed to bolt-on in order to avoid welding on the gate that would affect the factory paint. The steps were also designed as an integral part of the gate that would easily allow for them to be exchanged in case of dock damage.



Aluminum Platform MAX GRIP® STANDARD

Lightweight aluminum platform design with recessed hinges provides a flat loading surface over entire width of platform. The platform features MAXGRIP® (knurled platform surface) and dual assist torsion springs that minimize the opening and closing force.

Distributed by:

M-194-0523



MAXPRO® Paint or GALVANIZED Finish

This patented, Maxon exclusive paint process has a tough polyurea top coat and an AL rich primer that combat corrosion and keep the liftgate looking like new. For even more corrosion protection, the TE-33 is also available in a galvanized finish.

Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670
800.227.4116 Fax 888.771.7713, www.maxonlift.com