


Railgates

Tailgates By THIEMAN

Raising Performance to New Levels

MODEL TDR

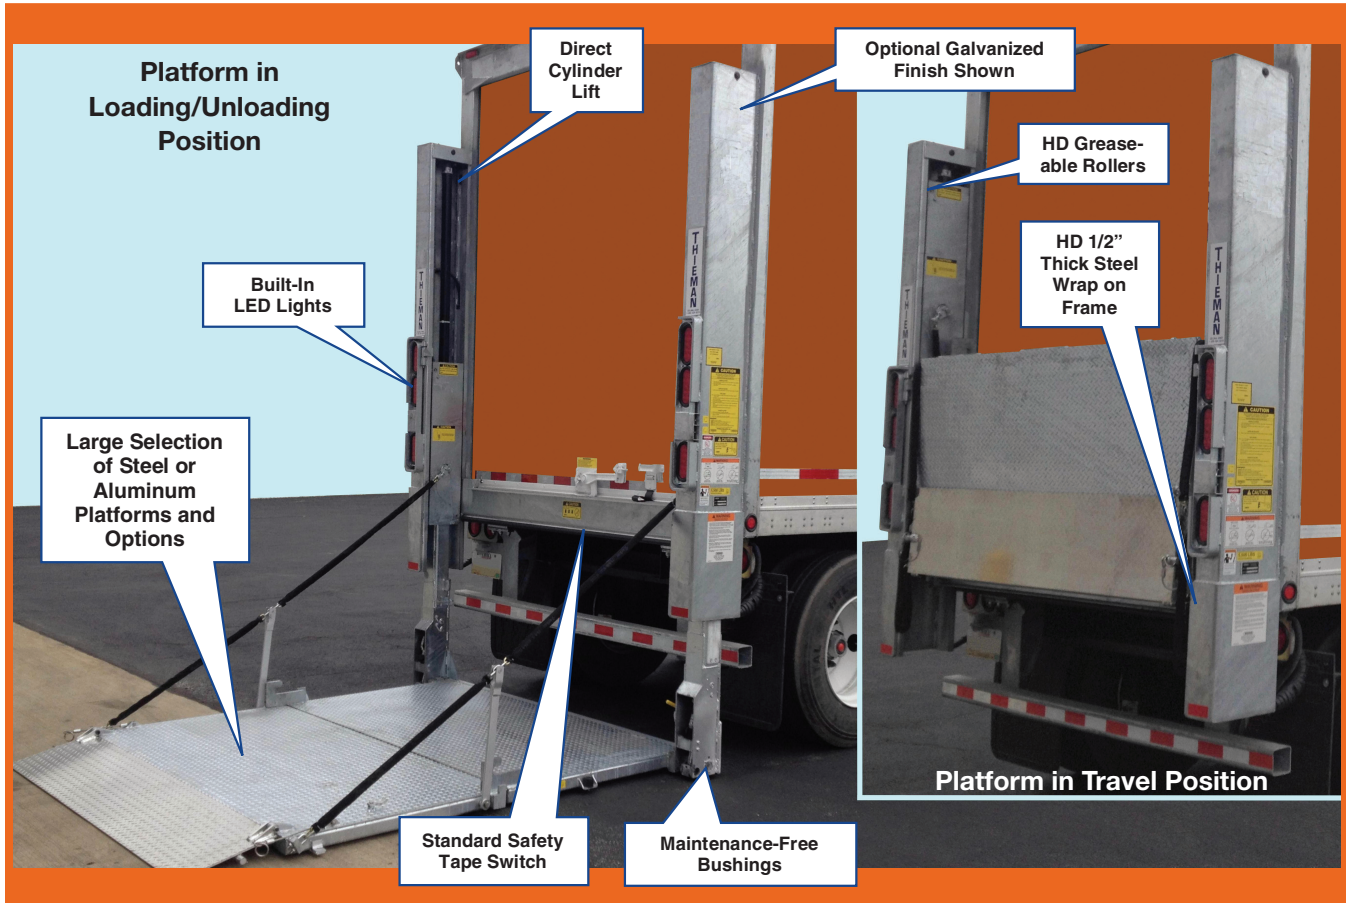

FEATURING:

- **NEW Solid-State Controller w/Less Wiring, Improved Logic, Built-in Diagnostics, etc.**
- **Direct Cylinder Lift**
- **HD Grease-able Rollers**
- **Built-In LED Lights**
- **Audible Safety Alarm (gate in motion)**
- **Safety Tape Switch (protects cargo)**
- **Power Unit Enclosure**
- **4400 to 6600 lb. Capacities**
- **Dual Fold/Unfold Cylinders**


Same robust mechanical design you've come to expect from Thieman, with NEW electrical system to deliver the reliability you deserve. NEW Solid-state controller offers many advantages (less wiring and connections, operates at lower voltages, improved logic, built-in diagnostics, etc.)

Designed for palletized, cart, and large cargo handling, the THIEMAN TDR Series has the benefits you need in a fully-hydraulic railgate.

With maintenance being the major concern with today's fleets, the TDR offers you maximum performance and reliability with minimal maintenance.

With its many standard features and available options, the THIEMAN TDR is a top choice among the fully-hydraulic railgates.

Features, Benefits and Specifications

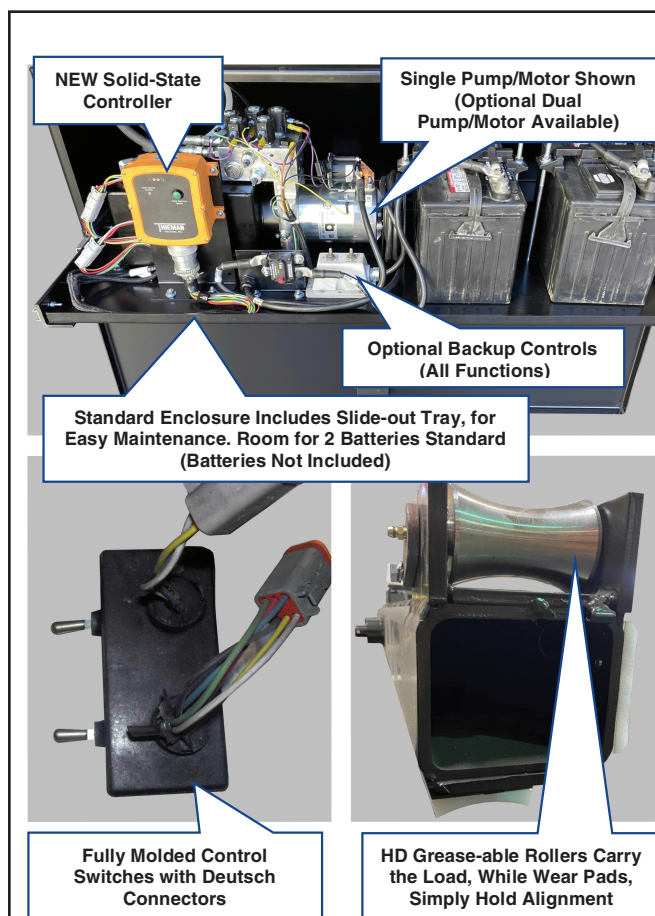

Standard Enclosure Includes Slide-out Tray, for Easy Maintenance. Room for 2 Batteries Standard (Batteries Not Included)

Fully Molded Control Switches with Deutsch Connectors

HD Grease-able Rollers Carry the Load, While Wear Pads, Simply Hold Alignment

STANDARD FEATURES AND BENEFITS:

- NEW Solid-state controller, reduces wiring and connections and provides diagnostics
- Audible safety alarm with gate in motion and safety tape switch to protect cargo
- Gravity lowering platform for reduced stress on power unit (Power down power units optional)
- Grease-able Rollers and UHMW wear pads in slider for smooth, reliable operation
- Dual cylinder power close for easy operation
- Meets all TMC electrical guidelines for reduced service requirements
- Recessed LED light package in rail column for protection and visibility
- Teflon composite bushings used with stress-proof pins for virtually maintenance-free operation at major pivot points
- 150 amp circuit breaker for electrical protection
- Weather protective power unit enclosure with slide out tray for easy access to power unit. Enclosure can accommodate two batteries, which are not included

OPTIONS FOR TDR SERIES:

- Aluminum Platforms
- In-Cab Cut Off Switch
- Trailer Kits
- Dock Seal Kit
- Dual Pump/Motor Power Units
- 102" Wide
- 16" Aluminum Retention Ramp
- Automatic and Foot Activated Cart Stops
- Galvanized Finish
- Backup control switch in pump/battery box
- PowerDown
- Bottle Gas Cage

MODEL NO.	PLATFORM	RAMP	LOAD CAPACITY	INSTALL WEIGHT	BED HEIGHT RANGE	OVERALL WIDTH
TDR-44	80" X 62"	15"	4400 lb.	2615 lb.	40" to 60"	96"
TDR-44	80" X 74"	15"	4400 lb.	2775 lb.	40" to 60"	96"
TDR-44	80" X 86"	16" Ret. Ramp	4400 lb.	2815 lb.	40" to 60"	96"
TDR-55	80" X 62"	15"	5500 lb.	2635 lb.	40" to 60"	96"
TDR-55	80" X 74"	15"	5500 lb.	2795 lb.	40" to 60"	96"
TDR-55	80" X 86"	16" Ret. Ramp	5500 lb.	2835 lb.	40" to 60"	96"
TDR-66	80" X 62"	15"	6600 lb.	2655 lb.	40" to 60"	96"
TDR-66	80" X 74"	15"	6600 lb.	2815 lb.	40" to 60"	96"
TDR-66	80" X 86"	16" Ret. Ramp	6600 lb.	2855 lb.	40" to 60"	96"

NOTE: Minimum bed height requirements for dock loading: 40" for 62" depth platforms, 45" for 74" and 86" depth platforms. All platforms, in chart above, fold in half for dock loading and for transit.

NOTE: Lower bed heights are possible depending on allowable ground clearance.

Distributed By:

THIEMAN
TAILGATES INC.
Raising Performance to New Levels

600 East Wayne Street
Celina, Ohio 45822
Phone: 419-586-7727 or
800-524-5210
Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com

THIEMAN Reserves the right to Change Products
Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 9/20 • 1M • MP104149


Railgates

Tailgates By THIEMAN


Raising Performance to New Levels

Model VL


Platform in
Loading/Unloading Position

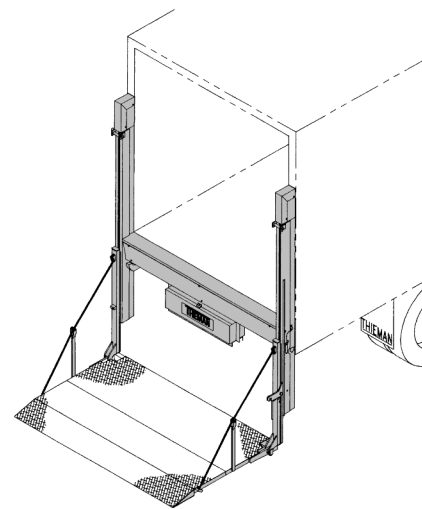

Platform in Docking Position

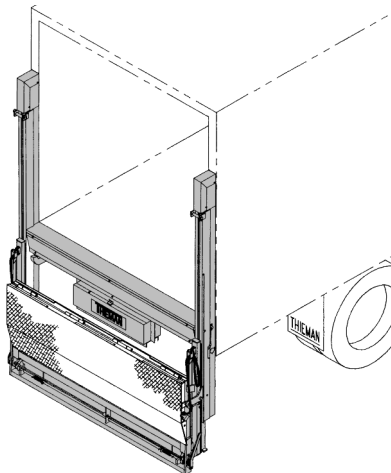

Platform in Travel Position

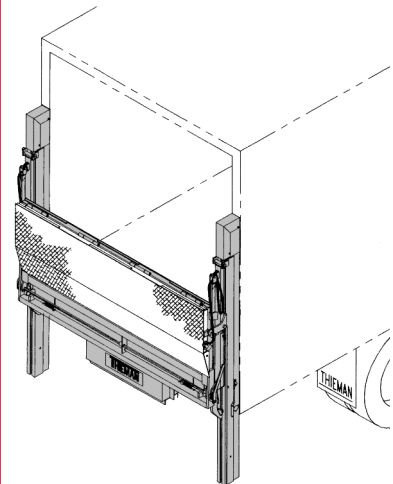

FEATURING:

- **Meets TMC Electrical Guidelines**
- **Pre-Assembled Pump and Cylinder**
- **Power Unit Enclosure**
- **90" x 36" to 90" x 72" Platforms**
- **3,000 to 5,000 lb. Capacities**
- **Direct Docking**
- **Power Close Platform**
- **Cable Brake**
- **Roller Sliders**

Designed for handling heavy palletized or bulky loads, the THIEMAN VL series is available with platform sizes up to 90" wide x 72" deep.

The THIEMAN VL platform lowers below bed height for dock loading and easy access to the cargo door.


Designed for strength and durability, the VL is built with the strongest "H" frame in the industry. With the heavy duty frame, high quality roller bearings and a cycle tested, premium lift cable, the THIEMAN VL is the leader of its class.




Features, Benefits and Specifications

Model VLBG


Platform in Loading/Unloading Position

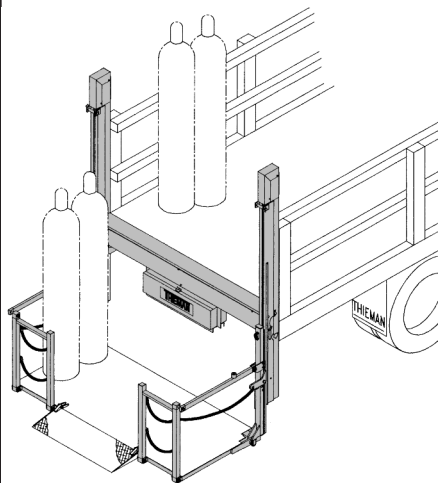

Platform in Docking Position

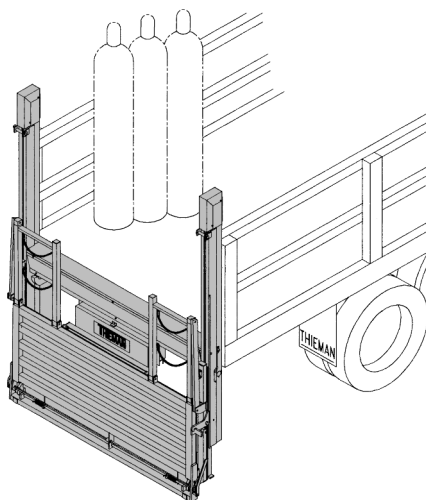

Platform in Travel Position

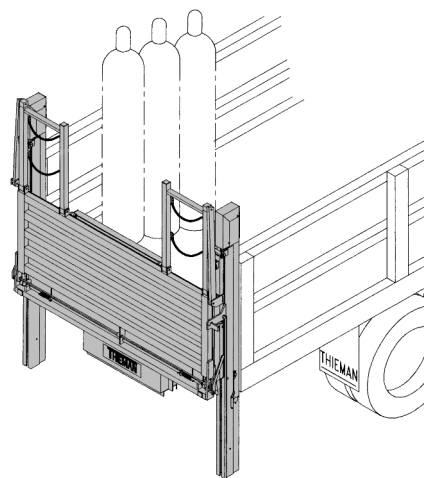

STANDARD FEATURES & BENEFITS:

- Weather Protective Power Unit Enclosure Prolongs Life of Power Unit
- Sealed Toggle Switch Control For Easy Operation and Increased reliability
- Cable Brake for Added Safety
- Unique Heavy Duty Slider Rollers for Smooth, Reliable, Long-Life Operation
- Meets All TMC Electrical Guidelines for Reduced Service Requirements
- Mounts on Truck or Trailer Body for Quick and Easy Installation
- Power Close Platform for Increased Efficiency
- Heavy Duty 3/8" H-Frame for Maximum Rail Strength and Impact Resistance
- Direct Dock Access for Easy Loading of Cargo
- 150 Amp Circuit Breaker for Electrical Protection
- Curb and Street Side Independent Height Adjustment

AVAILABLE OPTIONS FOR VL & VLBG:

- Remote Control w/Plug - Electric Operation Gravity Down (VL or VLBG).
- 16" Aluminum Retention Ramp (VL)
- Cart Stop - 4" Automatic (VL)
- 102" Wide Trailer (VL or VLBG)
- Trailer Kits

Model #	Platform	Load Capacity	Approx. Install Wt.	Bed Height Range
VL 30	90" x 36"+6"	3000 Lbs.	1645	44" to 55"
VL 30	90" x 42"+6"	3000 Lbs.	1676	* 44" to 55"
VL 30	90" x 60"+12"	3000 Lbs.	1745	44" to 55"
VL 30	90" x 72"+12"	3000 Lbs.	1805	44" to 55"
VL 40	90" x 36"+6"	4000 Lbs.	1665	44" to 55"
VL 40	90" x 42"+6"	4000 Lbs.	1696	* 44" to 55"
VL 40	90" x 60"+12"	4000 Lbs.	1765	44" to 55"
VL 40	90" x 72"+12"	4000 Lbs.	1825	44" to 55"
VL 50	90" x 36"+6"	5000 Lbs.	1685	44" to 55"
VL 50	90" x 42"+6"	5000 Lbs.	1716	* 44" to 55"
VL 50	90" x 60"+12"	5000 Lbs.	1785	44" to 55"
VL 50	90" x 72"+12"	5000 Lbs.	1845	44" to 55"
VLBG 30	90" x 36"+16"	3000 Lbs.	1695	44" to 55"
VLBG 30	90" x 42"+16"	3000 Lbs.	1714	* 44" to 55"
VLBG 40	90" x 36"+16"	4000 Lbs.	1710	44" to 55"
VLBG 40	90" x 42"+16"	4000 Lbs.	1734	44" to 55"

NOTE: 90" x 60" and 90" x 72" are Two Piece Platforms.
NOTE: VLBG has Automatic Folding Retention Fence.

NOTE: For bed heights over 55" contact factory.
*NOTE: On 42" Deep One Piece Platforms, the Minimum Bed Height Requirement for Dock Loading is 50"

Distributed By:

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 5/10 • 2M • MP70078

THIEMAN
TAILGATES INC.
Raising Performance to New Levels

600 East Wayne Street
Celina, Ohio 45822
Phone: 419-586-7727 or
800-524-5210
Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com


Railgates

Tailgates By THIEMAN


Raising Performance to New Levels

Model VL


Platform in
Loading/Unloading Position

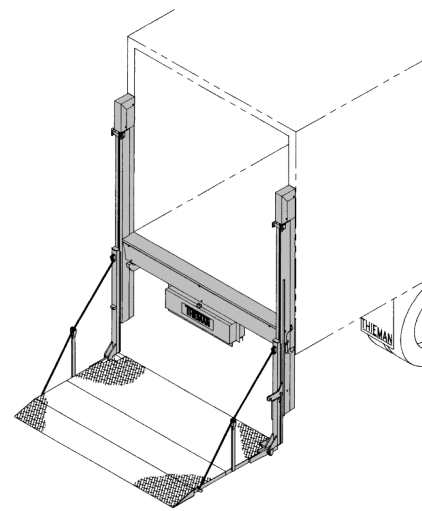

Platform in Docking Position

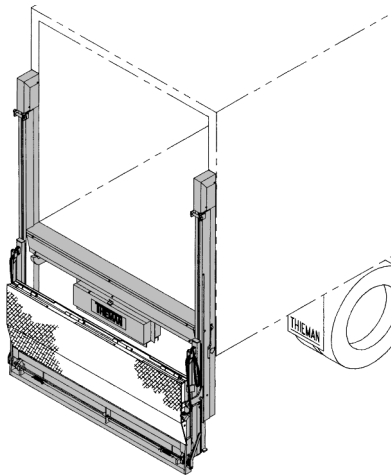

Platform in Travel Position

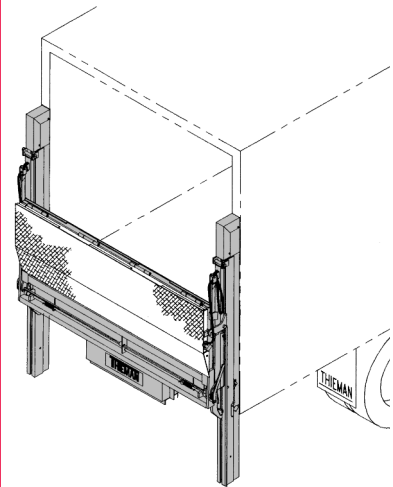

FEATURING:

- **Meets TMC Electrical Guidelines**
- **Pre-Assembled Pump and Cylinder**
- **Power Unit Enclosure**
- **90" x 36" to 90" x 72" Platforms**
- **3,000 to 5,000 lb. Capacities**
- **Direct Docking**
- **Power Close Platform**
- **Cable Brake**
- **Roller Sliders**

Designed for handling heavy palletized or bulky loads, the THIEMAN VL series is available with platform sizes up to 90" wide x 72" deep.

The THIEMAN VL platform lowers below bed height for dock loading and easy access to the cargo door.


Designed for strength and durability, the VL is built with the strongest "H" frame in the industry. With the heavy duty frame, high quality roller bearings and a cycle tested, premium lift cable, the THIEMAN VL is the leader of its class.




Features, Benefits and Specifications

Model VLBG


Platform in Loading/Unloading Position

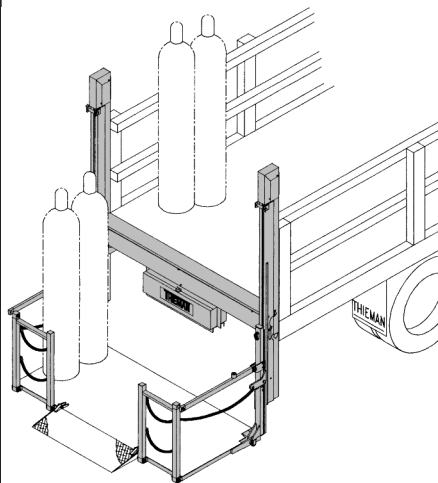

Platform in Docking Position

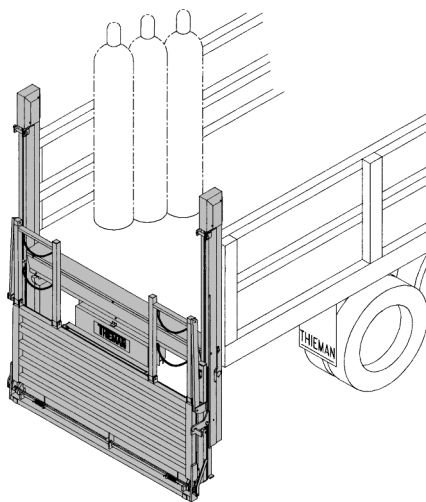

Platform in Travel Position

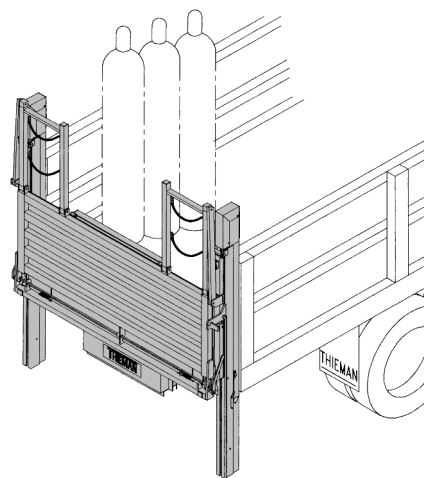

STANDARD FEATURES & BENEFITS:

- Weather Protective Power Unit Enclosure Prolongs Life of Power Unit
- Sealed Toggle Switch Control For Easy Operation and Increased reliability
- Cable Brake for Added Safety
- Unique Heavy Duty Slider Rollers for Smooth, Reliable, Long-Life Operation
- Meets All TMC Electrical Guidelines for Reduced Service Requirements
- Mounts on Truck or Trailer Body for Quick and Easy Installation
- Power Close Platform for Increased Efficiency
- Heavy Duty 3/8" H-Frame for Maximum Rail Strength and Impact Resistance
- Direct Dock Access for Easy Loading of Cargo
- 150 Amp Circuit Breaker for Electrical Protection
- Curb and Street Side Independent Height Adjustment

AVAILABLE OPTIONS FOR VL & VLBG:

- Remote Control w/Plug - Electric Operation Gravity Down (VL or VLBG).
- 16" Aluminum Retention Ramp (VL)
- Cart Stop - 4" Automatic (VL)
- 102" Wide Trailer (VL or VLBG)
- Trailer Kits

Model #	Platform	Load Capacity	Approx. Install Wt.	Bed Height Range
VL 30	90" x 36"+6"	3000 Lbs.	1645	44" to 55"
VL 30	90" x 42"+6"	3000 Lbs.	1676	* 44" to 55"
VL 30	90" x 60"+12"	3000 Lbs.	1745	44" to 55"
VL 30	90" x 72"+12"	3000 Lbs.	1805	44" to 55"
VL 40	90" x 36"+6"	4000 Lbs.	1665	44" to 55"
VL 40	90" x 42"+6"	4000 Lbs.	1696	* 44" to 55"
VL 40	90" x 60"+12"	4000 Lbs.	1765	44" to 55"
VL 40	90" x 72"+12"	4000 Lbs.	1825	44" to 55"
VL 50	90" x 36"+6"	5000 Lbs.	1685	44" to 55"
VL 50	90" x 42"+6"	5000 Lbs.	1716	* 44" to 55"
VL 50	90" x 60"+12"	5000 Lbs.	1785	44" to 55"
VL 50	90" x 72"+12"	5000 Lbs.	1845	44" to 55"
VLBG 30	90" x 36"+16"	3000 Lbs.	1695	44" to 55"
VLBG 30	90" x 42"+16"	3000 Lbs.	1714	* 44" to 55"
VLBG 40	90" x 36"+16"	4000 Lbs.	1710	44" to 55"
VLBG 40	90" x 42"+16"	4000 Lbs.	1734	44" to 55"

NOTE: 90" x 60" and 90" x 72" are Two Piece Platforms.
NOTE: VLBG has Automatic Folding Retention Fence.

NOTE: For bed heights over 55" contact factory.
*NOTE: On 42" Deep One Piece Platforms, the Minimum Bed Height Requirement for Dock Loading is 50"

Distributed By:

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 5/10 • 2M • MP70078

THIEMAN
TAILGATES INC.
Raising Performance to New Levels

600 East Wayne Street
Celina, Ohio 45822
Phone: 419-586-7727 or
800-524-5210
Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com

TopLifter

Tailgates By THIEMAN

Raising Performance to New Levels

Model TT-15



FEATURING:

- NEW optional OEM camera/sensor relocation kits available
- Two Piece Bumper (for use with many OEM receivers)
- Reduced Maintenance
- Streamline Design
- Meets TMC Electrical Guidelines
- Direct Dual Cylinder Lift, No Chains or Cables, Wide Opening to Truck Bed
- Heavy-Duty Steel Diamond Plate Platform
- Fully Enclosed Power Unit & Cylinders
- Fast & Easy Installation

The THIEMAN TT Series is completely assembled into one compact unit - ready to run. Simply bolt and/or weld it to the truck and connect the battery cable. Installation is fast and easy. And years from now, it will be just as simple to remount the TT-15 model on a new truck. The lifting mechanism is completely enclosed for a neat appearance and protection from the elements. A two piece bumper, for use with frame attached receivers, is standard on the TT15. The THIEMAN TT's overall design makes it a tough and reliable liftgate.

Features, Benefits and Specifications



Standard One-Piece Steel Platform with
Optional Light Kit



Shown with Optional Two-Piece Alum. Platform

STANDARD FEATURES AND BENEFITS:

- Dual Cylinder Design for Maximum Lifting Stability.
- Enclosed Cylinders and Power Units for Better Reliability and Easy Accessibility.
- Molded Toggle Switch (Environmentally Sealed).
- Torsion Assist on all 42" Deep Steel and 44" Deep Aluminum Platforms for Easier Opening & Closing of Platform.
- Skid Resistant Steel Diamond Plate Platform for Added Safety.
- Adjustable Cylinder Clevis for Easy Platform and Bed Alignment.
- 150 Amp Circuit Breaker for Electrical Protection.
- Two-Piece Bumper for use with Receivers.

AVAILABLE OPTIONS FOR TT-15:

- Platform Options Including:
Expanded Metal, 2-Piece Folding, Extruded Aluminum, Bar Grate.
- Remote Pendant Control.
- In-Cab Shut Off Switch.
- Light Kit.
- Tire Rack.
- Special Platform Widths and Depths.
- Galvanized Finish.
- OEM Camera/Sensor Relocation Kits.

Model #	Platform	Platform Material	Rated Load Capacity (Lbs.)	Approx. Inst. Wt. (Lbs.)	Bed Height Range
TT15-4926 1PC	49" x 26" + 5"	Steel	1500	500	30" to 45"
TT15-5326 1PC	53" x 26" + 5"	Steel	1500	512	30" to 45"
* TT15-5626 1PC	56" x 26" + 5"	Steel	1500	522	30" to 45"
TT15-4942 2PC	**49" x 42" + 5"	Steel	1500	650	30" to 45"
TT15-5342 2PC	**53" x 42" + 5"	Steel	1500	640	30" to 45"
* TT15-5642 2PC	**56" x 42" + 5"	Steel	1500	670	30" to 45"
TT15-AL-4926 1PC	49" x 26" + 6"	Aluminum	1500	460	30" to 45"
TT15-AL-5326 1PC	53" x 26" + 6"	Aluminum	1500	472	30" to 45"
* TT15-AL-5626 1PC	56" x 26" + 6"	Aluminum	1500	480	30" to 45"
TT15-AL-4932 2PC	**49" x 32" + 6"	Aluminum	1500	480	30" to 45"
TT15-AL-5332 2PC	**53" x 32" + 6"	Aluminum	1500	495	30" to 45"
* TT15-AL-5632 2PC	**56" x 32" + 6"	Aluminum	1500	505	30" to 45"
TT15-AL-4944 2PC	**49" x 44" + 6"	Aluminum	1500	525	30" to 45"
TT15-AL-5344 2PC	**53" x 44" + 6"	Aluminum	1500	535	30" to 45"
* TT15-AL-5644 2PC	**56" x 44" + 6"	Aluminum	1500	550	30" to 45"

*Installation Kit NOT Included (Installation Kit Must Be Ordered Separately for Models with 56" Wide Platforms).

**Two-Piece Platform (2PC)

TT15-49" x 26"/49" x 32"/49" x 42"/49" x 44"..... Utility and Service Bodies (Liftgate Frame Dimensions: Post OD=55.00, Post ID=48.62)

TT15-53" x 26"/53" x 32"/53" x 42"/53" x 44"..... Utility and Service Bodies (Liftgate Frame Dimensions: Post OD=59.00, Post ID=52.62)

TT15-56" x 26"/56" x 32"/56" x 42"/56" x 44"..... 1988 and Later GMC/Chevrolet Pickup, 1994 and Later Dodge Pickup, 1997 and Later Ford Pickup

Distributed By:

THIEMAN
TAILGATES INC.

Raising Performance to New Levels

THIEMAN Reserves the right to Change Products
Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 2/20 • 2M • MP102426



600 East Wayne Street
Celina, Ohio 45822
Phone: 419-586-7727 or
800-524-5210
Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com

TopLifter

Tailgates By THIEMAN

Raising Performance to New Levels

Model TT-16/20 RM

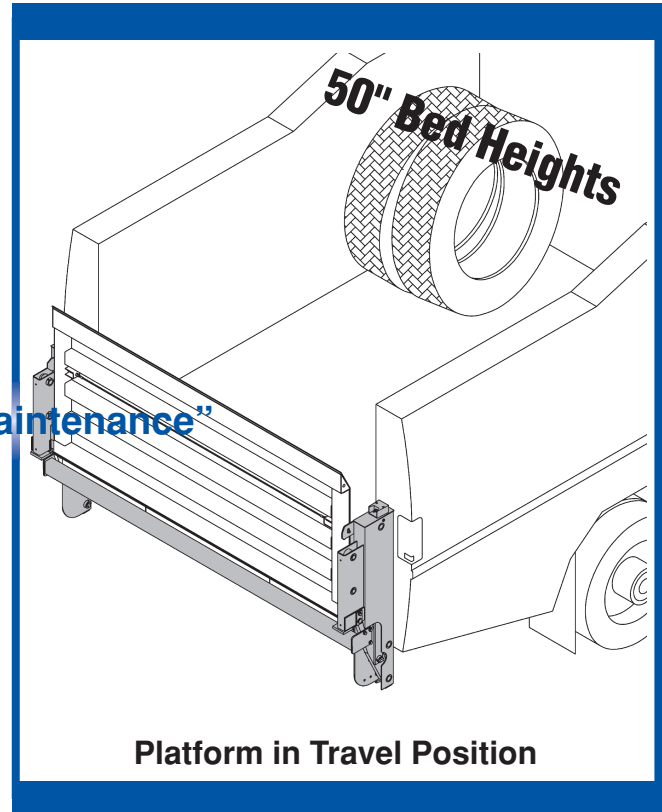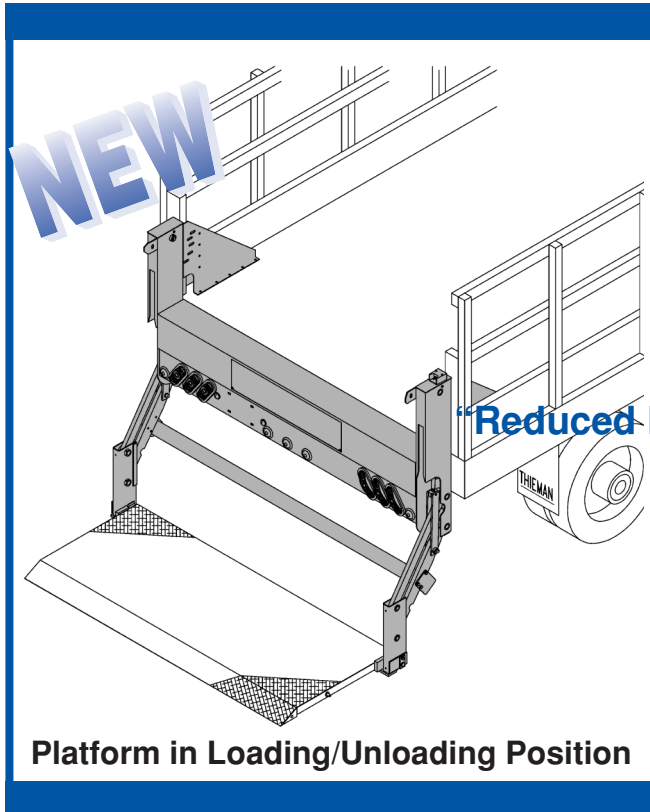


FEATURING:

- 50" Bed to Ground Travel
- Reduced Maintenance
- New Streamline Design
- Meets TMC Electrical Guidelines
- Direct Dual Cylinder Lift, No Chains or Cables
- 1,600 lb. & 2,000 lb. Capacity
- Heavy-Duty Steel Diamond Plate Platform
- Fully Enclosed Power Unit & Cylinders
- Fast & Easy Installation

The THIEMAN TT-16/20 is completely assembled into one compact unit - ready to run. Simply bolt and/or weld it to the truck bed and connect the battery cable. Installation is fast and easy. Plus, years from now the TT-16/20 will be just as simple to remount onto a new truck. The lifting mechanism is completely enclosed for a neat appearance and protection from the elements. The large platform makes awkward material a breeze to load and unload. The TT-16/20 overall design makes it the toughest liftgate available in its class.



Features, Benefits and Specifications

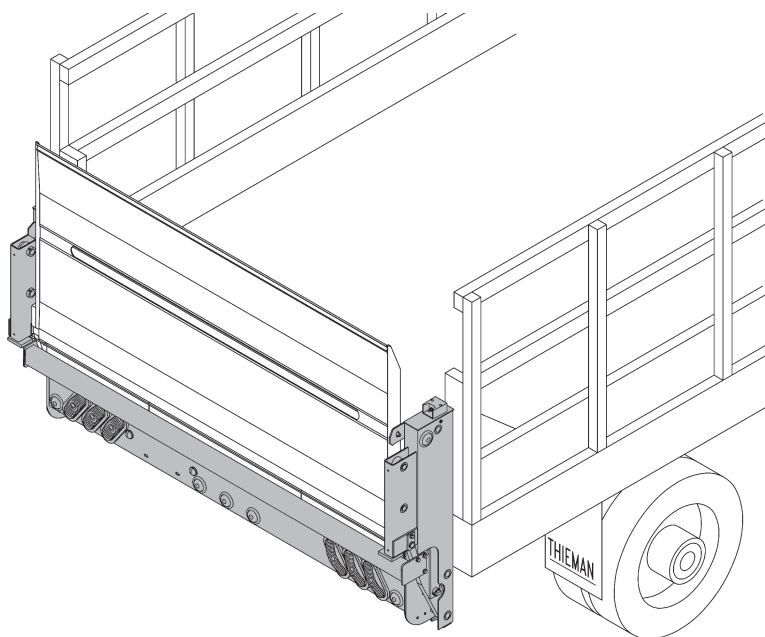

TT-16 Shown with Optional Aluminum Extrusion Platform and Light Kit

STANDARD FEATURES AND BENEFITS:

- Dual Cylinder Design for Maximum Lifting Stability.
- Meets all TMC Electrical Guidelines for Reduced Service Requirements.
- Enclosed Cylinders and Power Units for Better Reliability and Easy Accessibility.
- Toggle Switch Control for Better Dependability.
- Torsion Assist for Easier Platform Opening and Closing.
- Skid Resistant Steel Diamond Plate Platform for Added Safety.
- Adjustable Cylinder Clevis for Easy Platform and Bed Alignment.
- 150 Amp Circuit Breaker for Electrical Protection

AVAILABLE OPTIONS FOR TT-16:

- Platform Options Including: 2-Piece Folding, 38"/44" Deep Aluminum, 36"/42" Deep Steel
- Remote Pendant Control
- In-Cab Shut Off Switch
- Light Kit
- Power Lowering
- Heavy Duty Design - 2000 lbs. capacity

Platform	Size	Overall Width	Load Capacity	Weight	Bed Height
Aluminum Extrusion	80" x 32" + 5"	86"	1600 lbs.	540 lbs.	30" - 50"
Expanded Metal	80" x 30" + 5"	86"	1600 lbs.	620 lbs.	30" - 50"
Deck Plate	80" x 30" + 5"	86"	1600 lbs.	700 lbs.	30" - 50"
Aluminum Extrusion	86" x 32" + 5"	92"	1600 lbs.	560 lbs.	30" - 50"
Expanded Metal	86" x 30" + 5"	92"	1600 lbs.	640 lbs.	30" - 50"
Deck Plate	86" x 30" + 5"	92"	1600 lbs.	720 lbs.	30" - 50"
Aluminum Extrusion	80" x 32" + 5"	86"	2000 lbs.	560 lbs.	30" - 50"
Expanded Metal	80" x 30" + 5"	86"	2000 lbs.	640 lbs.	30" - 50"
Deck Plate	80" x 30" + 5"	86"	2000 lbs.	720 lbs.	30" - 50"
Aluminum Extrusion	86" x 32" + 5"	92"	2000 lbs.	580 lbs.	30" - 50"
Expanded Metal	86" x 30" + 5"	92"	2000 lbs.	660 lbs.	30" - 50"
Deck Plate	86" x 30" + 5"	92"	2000 lbs.	740 lbs.	30" - 50"

Application: Van Bodies, Flat Beds, Tire Service Bodies and Wide Service Bodies

Distributed By:

THIEMAN
TAILGATES INC.

Raising Performance to New Levels

600 East Wayne Street
Celina, Ohio 45822
Phone: (419) 586-7727 or
800-524-5210
Fax: (419) 586-9724
www.thiemantailgates.com
info@thiemantailgates.com


THIEMAN Reserves the right to Change Products
Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 2/08 • 2M • MP64269

TVLR SERIES


*new models with
BOTTOM ROLLERS standard*

Railgates By THIEMAN
Raising Performance to New Levels

STANDARD

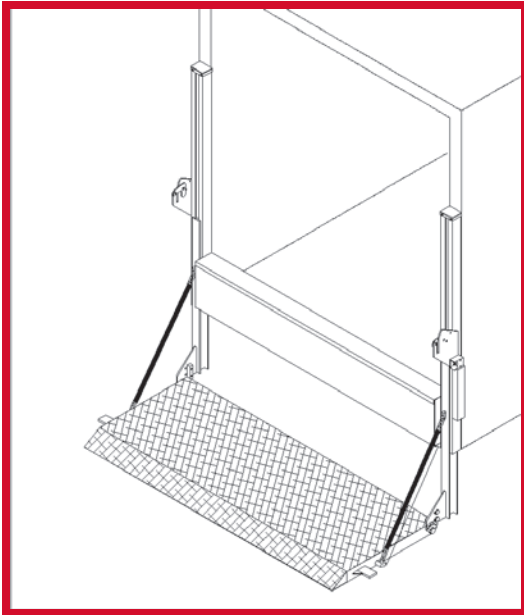

ABOVE BED

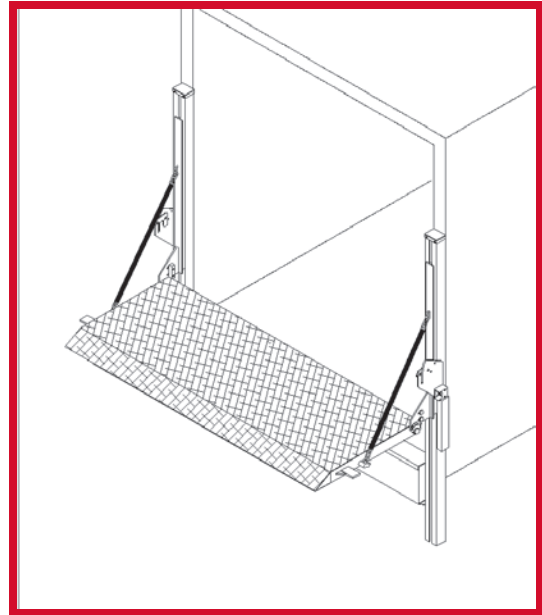

FEATURING:


- **NEW Sliders w/Bottom Rollers**
- **NEW Stronger Frame Design**
- **NEW 2 piece platform options**
- Fully Enclosed Pump and Cylinder
- Steel/Aluminum Platforms
- Level Ride Platform
- Auto Safety Latch System
- 1250 to 3000 Lb. Capacities
- Torsion Assist Platform Closing

Designed for the use on van and stake bodies, cutaways, and step-vans, the **NEW AND IMPROVED** Thieman TVLR railgate series is a reliable, low-maintenance, general-purpose liftgate.


This popular railgate has a wide range of lift capacities and is available for above-bed and special low-bed application. If overall weight is a concern the Thieman all aluminum AATVLR could be the right answer.

With its many standard features and versatile options, the **NEW AND IMPROVED** Thieman TVLR series, continues to be the future of general purpose railgates.


Steel Frame and Platform

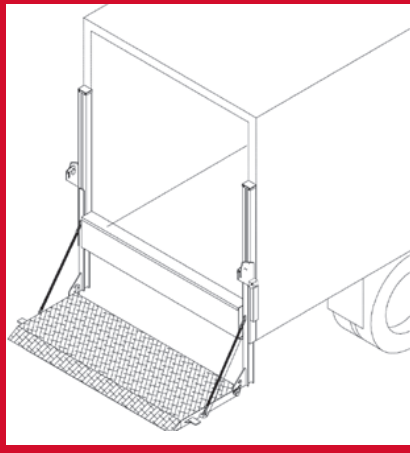

Platform in loading position

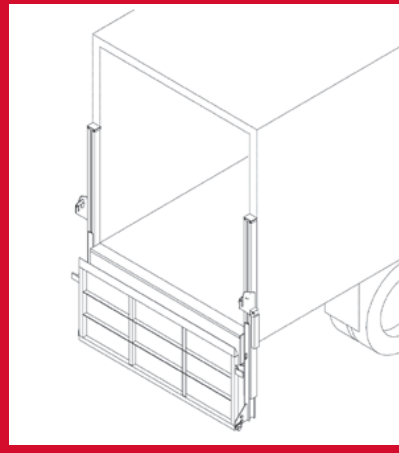

Platform in docking position

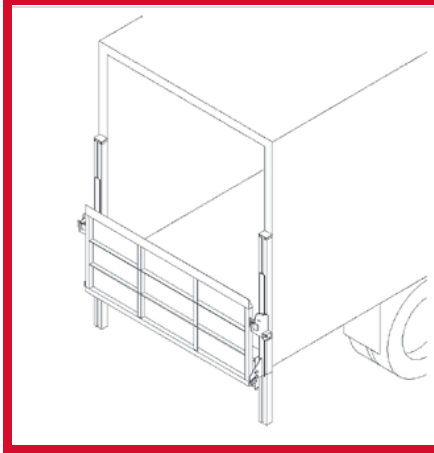

Platform in travel position

STANDARD FEATURES AND BENEFITS:

- Meets all TMC electrical guidelines for reduced service requirements.
- Pre-assembled, self-contained pump and cylinder for easy installation and protection from the weather.
- Automatic safety latch for hands free disengagement of the platform both in and out of stowed position.
- Low friction roller slider for smooth operation.
- Torsion bars assist for easy platform handling.
- Pre-assembled toggle switch assembly for easy operation and increased reliability.
- Liftgate lowers below bed height for dock loading depending on bed height & platform depth
- 150 Amp circuit breaker for electrical protection.

AVAILABLE OPTIONS FOR TVLR SERIES:

- Low bed capability
- Safety cut-off switch
- Remote pendant control
- Special platform sizes/2 pc dock loading
- Steel, expanded metal and bar grate platforms
- 102" Wide body
- Bottle gas cage (30" & 36" depths only)
- Light kits
- In-Cab Shut Off Switch
- Aluminum retention ramp

Model #	Platform Widths	Platform Depths	Load Capacity	Above Bed Range	Bed Height Range	Overall Width
TVLR 125	75" & 85"	30", 36"	1250 lbs.	N/A	33"-46", 33"-56"	80" & 90"
TVLR 16	90"	30", 36", 42"	1600 lbs.	N/A	33" to 56"	95"
TVLR 20	90"	30", 36", 42", 48"	2000 lbs.	N/A	33" to 56"	95"
TVLR 30	90"	30", 36", 42", 48"	3000 lbs.	N/A	33" to 56"	95"
TVLR 125A	75" & 85"	30", 36"	1250 lbs.	16"-10"	33"-46", 33"-46"	80" & 90"
TVLR 16A	90"	30", 36", 42"	1600 lbs.	16"-10"	33" to 46"	95"
TVLR 20A	90"	30", 36", 42", 48"	2000 lbs.	16"-10"	33" to 46"	95"
TVLR 30A	90"	30", 36", 42", 48"	3000 lbs.	16"-10"	33" to 46"	95"


A-Above bed (Maximum bed height 46")

*For special bed heights and platform sizes, contact the factory.


Application: Van Bodies, Stake Bodies, and Trailers

All Steel platforms have 5" ramps


Steel Frame Aluminum Platform

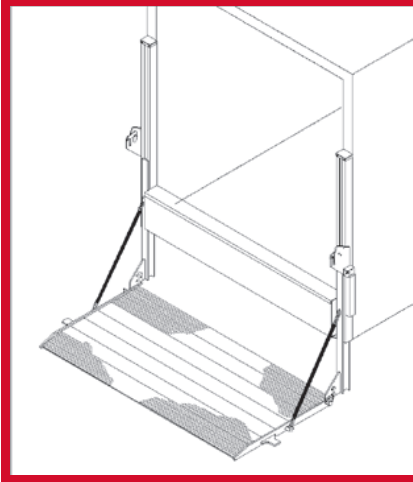

Platform in loading position

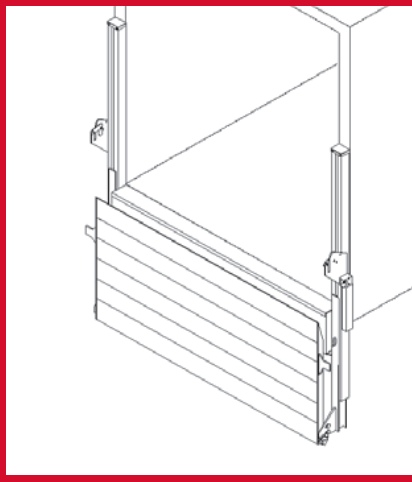

Platform in docking position

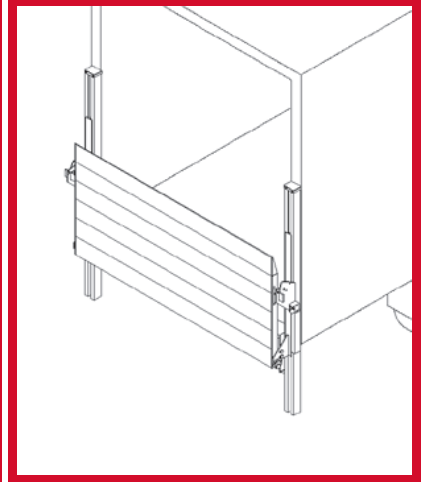

Platform in travel position

STANDARD FEATURES AND BENEFITS:

- Meets all TMC electrical guidelines for reduced service requirements.
- Pre-assembled, self-contained pump and cylinder for easy installation and protection from the weather.
- Automatic safety latch for hands free disengagement of the platform both in and out of stowed position.
- Low friction roller slider for smooth operation.
- Torsion bars assist for easy platform handling.
- Pre-assembled toggle switch assembly for easy operation and increased reliability.
- Liftgate lowers below bed height for dock loading depending on bed height & platform depth
- 150 Amp circuit breaker for electrical protection.

AVAILABLE OPTIONS FOR TVLR-AL SERIES:

- Low bed capability
- Safety cut-off switch
- Remote pendant control
- Special platform sizes/2 pc dock loading
- 102" Wide body
- Bottle gas cage (30" & 36" depths only)
- Light kits
- In-Cab Shut Off Switch
- Aluminum retention ramp
- Foot activated cart stop (single or dual)

Model #	Platform Widths	Platform Depths	Load Capacity	Above Bed Range	Bed Height Range	Overall Width
TVLR 125AL	75" & 85"	30", 36", 42", 48", 54", 60"	1250 lbs.	N/A	33"-46", 33"-56"	80" & 90"
TVLR 16AL	90"	30", 36", 42", 48", 54", 60" 66", 72"	1600 lbs.	N/A	33" to 56"	95"
TVLR 20AL	90"	30", 36", 42", 48", 54", 60" 66", 72"	2000 lbs.	N/A	33" to 56"	95"
TVLR 30AL	90"	42", 48", 54", 60", 66", 72"	3000 lbs.	N/A "	33" to 56"	95"
TVLR 125A-AL	75" & 85"	30", 36", 42", 48", 54", 60"	1250 lbs.	16"-10"	33"-46", 33"-46"	80" & 90"
TVLR 16A-AL	90"	30", 36", 42", 48", 54", 60" 66", 72"	1600 lbs.	16"-10"	33" to 46"	95"
TVLR 20A-AL	90"	30", 36", 42", 48", 54", 60" 66", 72"	2000 lbs.	16"-10"	33" to 46"	95"
TVLR 30A-AL	90"	42", 48", 54", 60", 66", 72"	3000 lbs.	16"-10"	33" to 46"	95"


A-Above bed (Maximum bed height 46")

*For special bed heights and platform sizes, contact the factory.


Application: Van Bodies, Stake Bodies, and Trailer

All Aluminum platforms have 6" ramps


Steel Frame 2 Pc (Dockload) Platform

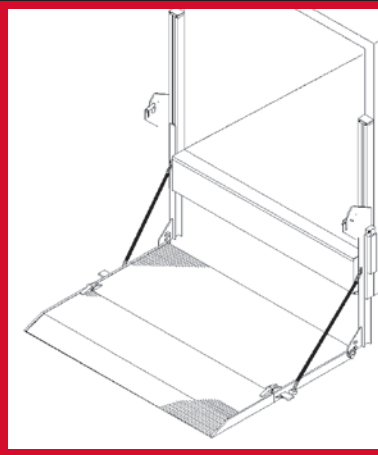

Platform in loading position

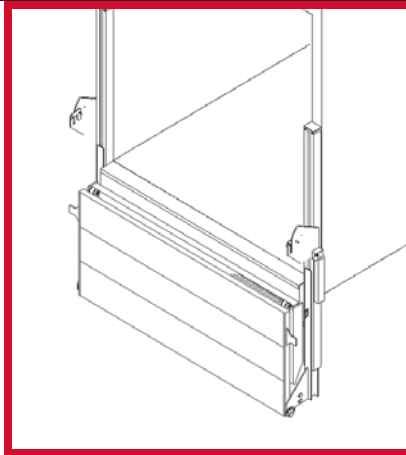

Platform in docking position

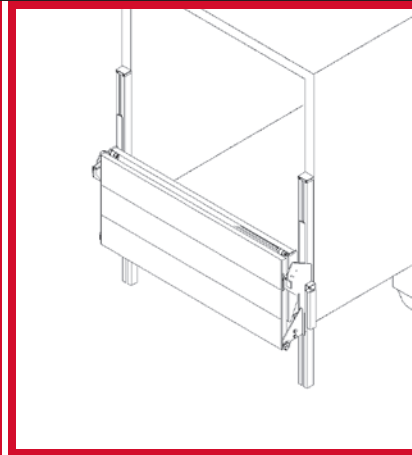

Platform in travel position

STANDARD FEATURES AND BENEFITS:

- Meets all TMC electrical guidelines for reduced service requirements.
- Pre-assembled, self-contained pump and cylinder for easy installation and protection from the weather.
- Automatic safety latch for hands free disengagement of the platform both in and out of stowed position.
- Low friction roller slider for smooth operation.
- Torsion bars assist for easy platform handling.
- Pre-assembled toggle switch assembly for easy operation and increased reliability.
- Liftgate lowers below bed height for dock loading depending on bed height & platform depth
- 150 Amp circuit breaker for electrical protection.

AVAILABLE OPTIONS FOR TVLR SERIES:

- Low bed capability
- Safety cut-off switch
- Remote pendant control
- Special platform sizes
- Aluminum platforms
- 102" Wide body
- Light kits
- In-Cab Shut Off Switch
- Aluminum retention ramp
- Foot activated cart stop (single or dual)

Model #	Platform Widths	Platform Depths	Extension Depths	Load Capacity	Above Bed Range	Bed Height Range	Overall Width
TVLR 125	75" & 85"	30", 36", 42"	12" & 18"	1250 lbs.	N/A	33"-46", 33"-56"	80" & 90"
TVLR 16	90"	30", 36", 42"	12" & 18"	1600 lbs.	N/A	33" to 56"	95"
TVLR 20	90"	30", 36", 42"	12" & 18"	2000 lbs.	N/A	33" to 56"	95"
TVLR 30	90"	30", 36", 42"	12" & 18"	3000 lbs.	N/A	33" to 56"	95"
TVLR 125A	75" & 85"	30", 36", 42"	12" & 18"	1250 lbs.	16"-10"	33"-46", 33"-46"	80" & 90"
TVLR 16A	90"	30", 36", 42"	12" & 18"	1600 lbs.	16"-10"	33" to 46"	95"
TVLR 20A	90"	30", 36", 42"	12" & 18"	2000 lbs.	16"-10"	33" to 46"	95"
TVLR 30A	90"	30", 36", 42"	12" & 18"	3000 lbs.	16"-10"	33" to 46"	95"

A-Above bed (Maximum bed height 46")

*For special bed heights and platform sizes, contact the factory.

Application: Van Bodies, Stake Bodies, and Trailers

All Aluminum platforms have 6" ramps



Raising Performance to New Levels

600 East Wayne Street
Celina, Ohio 45822
Phone: 800-524-5210
Fax: 419-586-9724

www.thieman.com
info@thiemantailgates.com


WeightLifter

Tailgates By THIEMAN


Raising Performance to New Levels

Model WT

Platform in Loading/Unloading Position

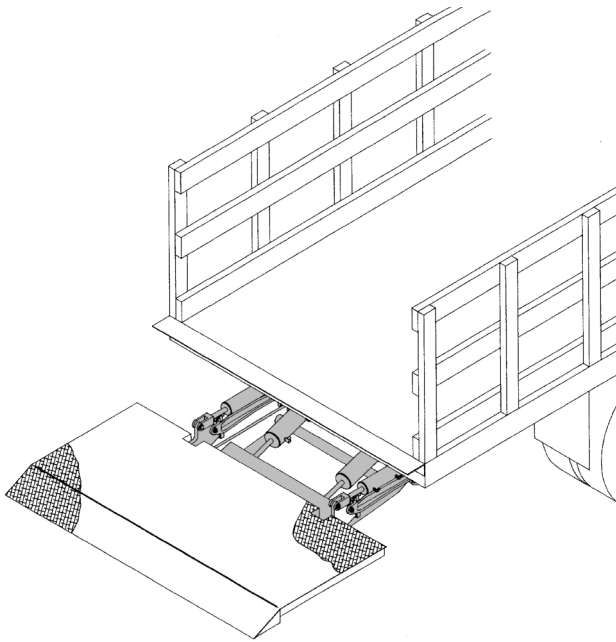

Platform in Travel Position

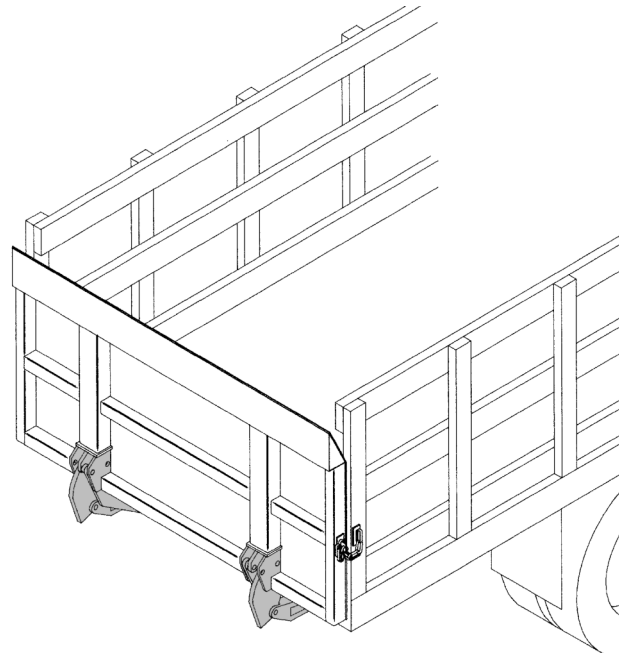

FEATURING:

- Meets TMC Electrical Guidelines
- 84" x 36" to 90" x 48" Platforms
- 2,000 to 4,000 lb. Capacities
- Bed Height Range 40" to 54"
- Dual Cylinder Lift
- Sealed Toggle Switch Control
- Latch Chains and Snubber Kit
- Power Down Lowering
- Cast Bronze Bearings at Pivot Points

Designed for use on stake and van bodies, the THIEMAN WT series is the most durable, dependable, conventional liftgate on the market today. The WT is built with many standard features including a wide-arm, dual cylinder lift, giving maximum lifting stability when handling sizeable loads. With the addition of cast bronze bearings at critical wear points, this conventional style liftgate is built to last for many years.

If you're searching for a conventional liftgate that improves efficiency and saves your company dollars, the THIEMAN WT is your answer.



Features, Benefits and Specifications

STANDARD FEATURES AND BENEFITS:

- Environmentally Sealed Toggle Switch Control for Enhanced Reliability and Easy Installation
- Dual Cylinder Lift for Maximum Stability
- Screw-In Grease Fittings at all Wear Points for Easy Maintenance
- Latch Chains and Snubber Kits for Increased Safety and Reduced Wear of Liftgate
- 150 Amp Circuit Breaker for Electrical Protection
- Adjustable Cylinder Shafts and Idler Arms for Precise Alignment of Truck Floor & Platform
- Power Down for Better Reliability in Cold Weather Operation
- Bronze Bushings at Critical Pivot Points for Reduced Maintenance Costs
- Wider Lift Arms for Maximum Stability
- Meets All TMC Electrical Guidelines for Reduced Service Requirements

AVAILABLE OPTIONS FOR WT:

- In-Cab Shut Off Switch
- Pump and Motor Cover
- Power Unit Enclosure
- Special Platform and Ramp Sizes
- Aluminum Platform
- Expanded Metal Platform
- Bar Grate

Model No.	Platform	Rated Load Cap. lbs.	Lowering	Approx. Installed Weight	Bed Height Range
WT20EST	84" x 36" + 10"	2000	Power	938	40" to 54"
WT20EST	90" x 36" + 10"	2000	Power	958	40" to 54"
WT20P	84" x 36" + 10"	2000	Power	936	40" to 54"
WT20P	90" x 36" + 10"	2000	Power	956	40" to 54"
WT20EST	90" x 42" + 10"	1750	Power	981	40" to 54"
WT20EST	90" x 48" + 10"	1500	Power	1069	40" to 54"
WT20P	90" x 42" + 10"	1750	Power	989	40" to 54"
WT20P	90" x 48" + 10"	1500	Power	1051	40" to 54"
WT30EST	84" x 36" + 10"	3000	Power	936	40" to 54"
WT30EST	90" x 36" + 10"	3000	Power	956	40" to 54"
WT30P	84" x 36" + 10"	3000	Power	906	40" to 54"
WT30P	90" x 36" + 10"	3000	Power	926	40" to 54"
WT30EST	90" x 42" + 10"	2500	Power	1009	40" to 54"
WT30EST	90" x 48" + 10"	2000	Power	1081	40" to 54"
WT30P	90" x 42" + 10"	2500	Power	1037	40" to 54"
WT30P	90" x 48" + 10"	2000	Power	1101	40" to 54"
WT40EST	90" x 36" + 10"	4000	Power	1006	40" to 54"
WT40EST	90" x 42" + 10"	3500	Power	1059	40" to 54"
WT40EST	90" x 48" + 10"	3000	Power	1121	40" to 54"
WT40P	90" x 36" + 10"	4000	Power	1055	40" to 54"
WT40P	90" x 42" + 10"	3500	Power	1059	40" to 54"
WT40P	90" x 48" + 10"	3000	Power	1135	40" to 54"

Note: On "P" Model Gates a 70% ratio PTO is recommended

EST - Electric w/Toggle Switch Control, Power Down/Power Close
P - PTO w/Power Close

Distributed By:

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 5/10 • 2M • M70079

THIEMAN
TAILGATES, INC.
Raising Performance to New Levels

600 East Wayne Street
Celina, Ohio 45822
Phone: 419-586-7727 or
800-524-5210
Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com


WeightLifter

Tailgates By THIEMAN


Raising Performance to New Levels

Model WT

Platform in Loading/Unloading Position

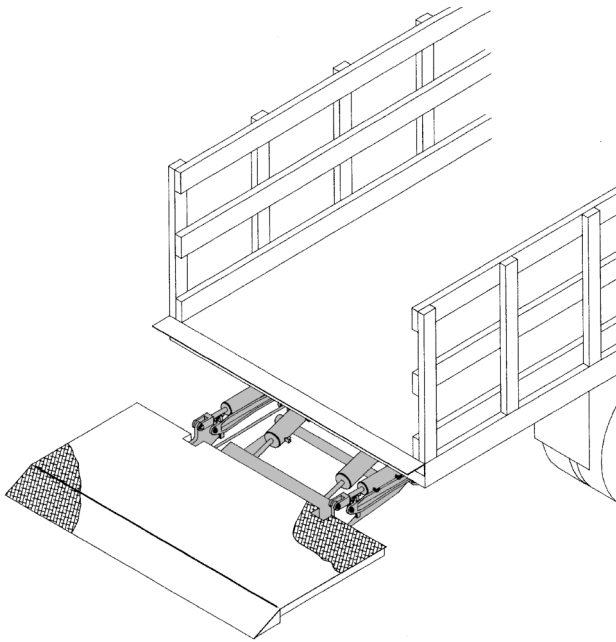

Platform in Travel Position

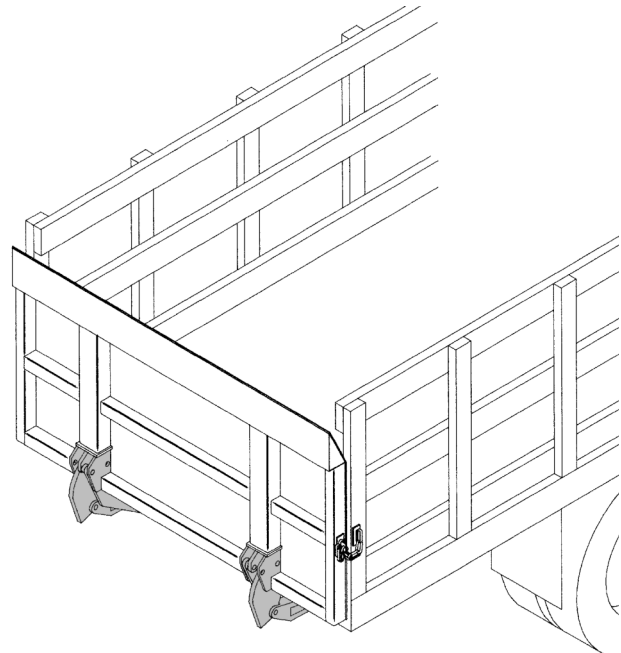

FEATURING:

- Meets TMC Electrical Guidelines
- 84" x 36" to 90" x 48" Platforms
- 2,000 to 4,000 lb. Capacities
- Bed Height Range 40" to 54"
- Dual Cylinder Lift
- Sealed Toggle Switch Control
- Latch Chains and Snubber Kit
- Power Down Lowering
- Cast Bronze Bearings at Pivot Points

Designed for use on stake and van bodies, the THIEMAN WT series is the most durable, dependable, conventional liftgate on the market today. The WT is built with many standard features including a wide-arm, dual cylinder lift, giving maximum lifting stability when handling sizeable loads. With the addition of cast bronze bearings at critical wear points, this conventional style liftgate is built to last for many years.

If you're searching for a conventional liftgate that improves efficiency and saves your company dollars, the THIEMAN WT is your answer.



Features, Benefits and Specifications

STANDARD FEATURES AND BENEFITS:

- Environmentally Sealed Toggle Switch Control for Enhanced Reliability and Easy Installation
- Dual Cylinder Lift for Maximum Stability
- Screw-In Grease Fittings at all Wear Points for Easy Maintenance
- Latch Chains and Snubber Kits for Increased Safety and Reduced Wear of Liftgate
- 150 Amp Circuit Breaker for Electrical Protection
- Adjustable Cylinder Shafts and Idler Arms for Precise Alignment of Truck Floor & Platform
- Power Down for Better Reliability in Cold Weather Operation
- Bronze Bushings at Critical Pivot Points for Reduced Maintenance Costs
- Wider Lift Arms for Maximum Stability
- Meets All TMC Electrical Guidelines for Reduced Service Requirements

AVAILABLE OPTIONS FOR WT:

- In-Cab Shut Off Switch
- Pump and Motor Cover
- Power Unit Enclosure
- Special Platform and Ramp Sizes
- Aluminum Platform
- Expanded Metal Platform
- Bar Grate

Model No.	Platform	Rated Load Cap. lbs.	Lowering	Approx. Installed Weight	Bed Height Range
WT20EST	84" x 36" + 10"	2000	Power	938	40" to 54"
WT20EST	90" x 36" + 10"	2000	Power	958	40" to 54"
WT20P	84" x 36" + 10"	2000	Power	936	40" to 54"
WT20P	90" x 36" + 10"	2000	Power	956	40" to 54"
WT20EST	90" x 42" + 10"	1750	Power	981	40" to 54"
WT20EST	90" x 48" + 10"	1500	Power	1069	40" to 54"
WT20P	90" x 42" + 10"	1750	Power	989	40" to 54"
WT20P	90" x 48" + 10"	1500	Power	1051	40" to 54"
WT30EST	84" x 36" + 10"	3000	Power	936	40" to 54"
WT30EST	90" x 36" + 10"	3000	Power	956	40" to 54"
WT30P	84" x 36" + 10"	3000	Power	906	40" to 54"
WT30P	90" x 36" + 10"	3000	Power	926	40" to 54"
WT30EST	90" x 42" + 10"	2500	Power	1009	40" to 54"
WT30EST	90" x 48" + 10"	2000	Power	1081	40" to 54"
WT30P	90" x 42" + 10"	2500	Power	1037	40" to 54"
WT30P	90" x 48" + 10"	2000	Power	1101	40" to 54"
WT40EST	90" x 36" + 10"	4000	Power	1006	40" to 54"
WT40EST	90" x 42" + 10"	3500	Power	1059	40" to 54"
WT40EST	90" x 48" + 10"	3000	Power	1121	40" to 54"
WT40P	90" x 36" + 10"	4000	Power	1055	40" to 54"
WT40P	90" x 42" + 10"	3500	Power	1059	40" to 54"
WT40P	90" x 48" + 10"	3000	Power	1135	40" to 54"

Note: On "P" Model Gates a 70% ratio PTO is recommended

EST - Electric w/Toggle Switch Control, Power Down/Power Close
P - PTO w/Power Close

Distributed By:

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 5/10 • 2M • M70079

THIEMAN
TAILGATES, INC.
Raising Performance to New Levels

600 East Wayne Street
Celina, Ohio 45822
Phone: 419-586-7727 or
800-524-5210
Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com


WEIGHTLIFTER

Tailgates By **THIEMAN**


Raising Performance to New Levels

Model TWL

Platform in Loading/Unloading Position

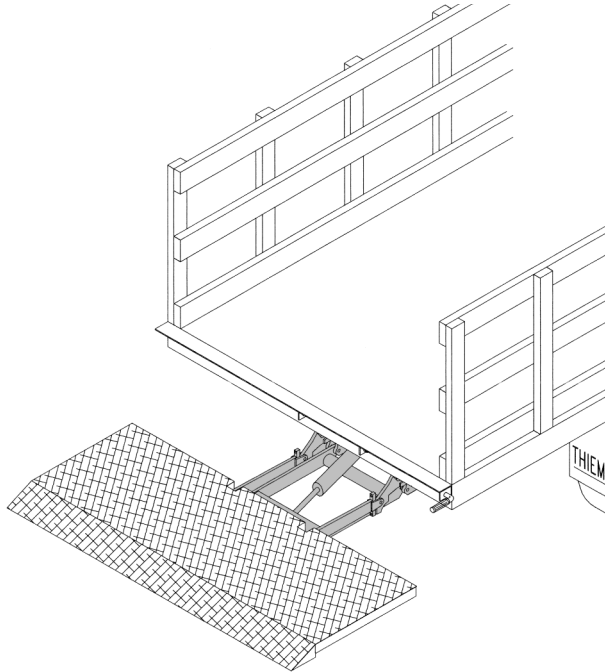

Platform in Travel Position

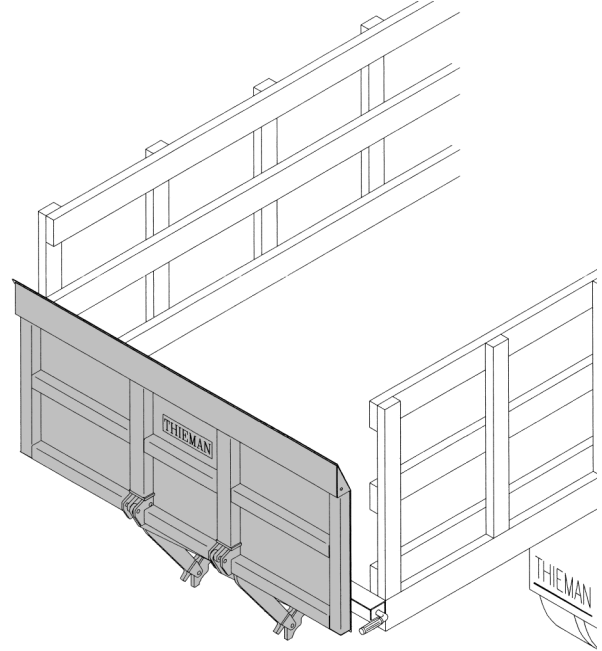

FEATURING:

- Meets TMC Electrical Guidelines
- 66" x 26" to 90" x 32" Platforms
- 1250 to 2000 lb. Capacities
- Cam Activated Power Close Platform
- Gravity Down Lowering
- Adjustable Cylinder Shaft
- Bed Height Range 33"-47" and 37"-52"

Designed for use on stake and van bodies, the THIEMAN TWL series is the most versatile and durable general purpose conventional style liftgate. The TWL features a wide range of bed heights which makes it possible to meet a variety of delivery needs.

The THIEMAN TWL's proven track record of dependability makes it a top choice for many applications.



Features, Benefits and Specifications

STANDARD FEATURES AND BENEFITS:

- | | |
|---|--|
| <ul style="list-style-type: none"> • Screw in Grease Fittings at All Wear Points for Easier Maintenance • Adjustable Cylinder Shaft for Precise Alignment of Truck Floor and Platform • 150 Amp Circuit Breaker for Electrical Protection • Gravity Down Platform for Less Demand on Power Unit | <ul style="list-style-type: none"> • Cam Activated, Power Close Platform for Easy Closing • Latch Chain for Increased Safety • Meets All TMC Electrical Guidelines for Reduced Service Requirements |
|---|--|

OPTIONS FOR TWL SERIES:

- | | |
|--|--|
| <ul style="list-style-type: none"> • Push Button Control • In-Cab Shut Off Switch • Remote Pendant Control • Expanded Metal Platform • Load Area, Ramp Change | <ul style="list-style-type: none"> • Power Down • PTO Power Source • Square Edge, No Ramp • Power Unit Enclosure |
|--|--|

Model No.	Platform	Capacity	Lowering	Install Weight	Bed Height Range
TWL-125ET	66" x 26" + 8"	1250 lb.	Gravity	436 lb.	33"-47"
TWL-125ET	78" x 32" + 8"	1250 lb.	Gravity	531 lb.	33"-47"
TWL-125ET	84" x 32" + 8"	1250 lb.	Gravity	546 lb.	33"-47"
TWL-16ET	78" x 32" + 8"	1600 lb.	Gravity	561 lb.	37"-52"
TWL-16ET	84" x 32" + 8"	1600 lb.	Gravity	576 lb.	37"-52"
TWL-16ET	90" x 32" + 8"	1600 lb.	Gravity	596 lb.	37"-52"
TWL-20ET	78" x 32" + 8"	2000 lb.	Gravity	564 lb.	37"-52"
TWL-20ET	84" x 32" + 8"	2000 lb.	Gravity	579 lb.	37"-52"
TWL-20ET	90" x 32" + 8"	2000 lb.	Gravity	599 lb.	37"-52"

ET - Electric w/Toggle Switch Control/Power Close

Distributed By:

THIEMAN
TAILGATES INC.
Raising Performance to New Levels

600 East Wayne Street
 Celina, Ohio 45822
 Phone: (419) 586-7727 or
 800-524-5210
 Fax: (419) 586-9724
 www.thieman.com
 ttgates@wesnet.com



THIEMAN Reserves the right to Change Products
 Specifications at any time Without Prior Notice.
 Printed in U.S.A. 12/00 • 2M • MP46572

StowAway

Tailgates By THIEMAN

Raising Performance to New Levels

MDC-SERIES

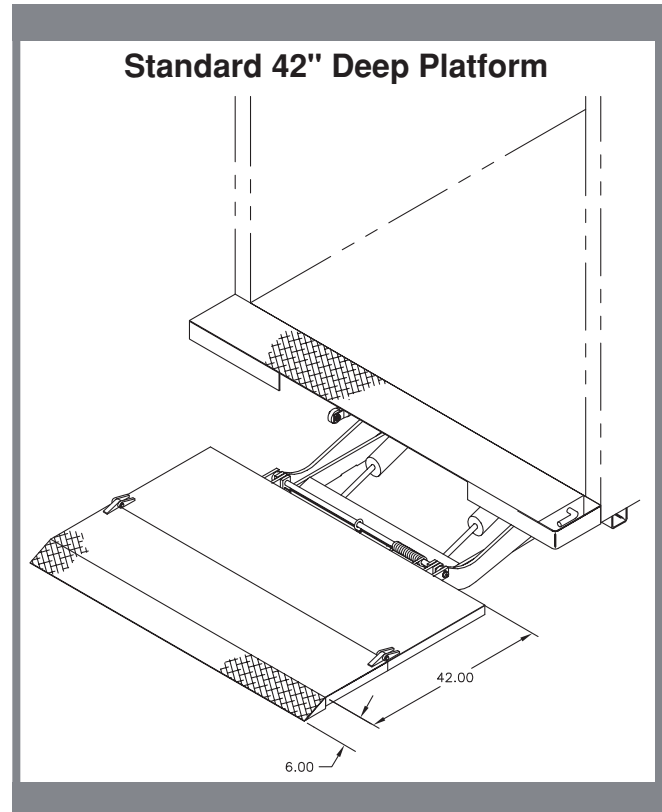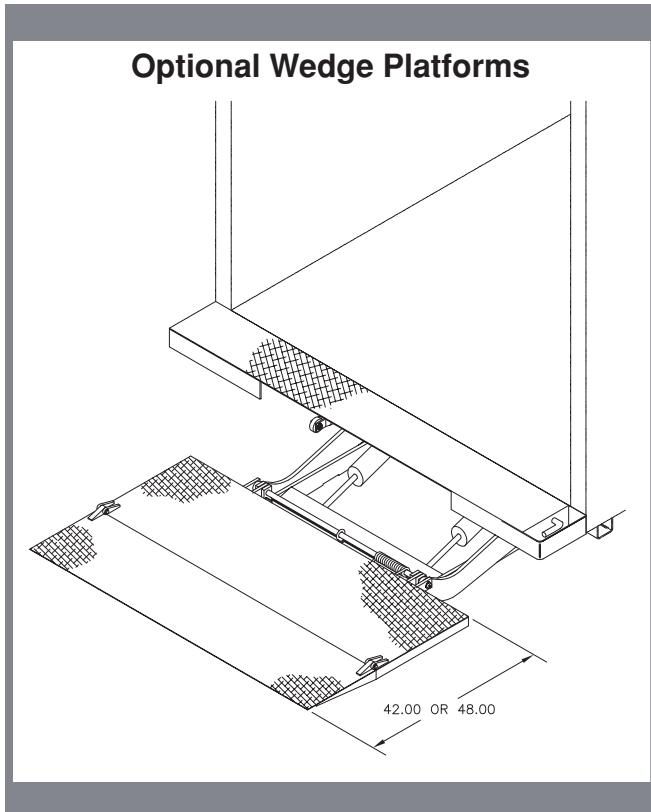

FEATURING:


- Reduced Maintenance Bushings
- Fast and Easy Installation
- 2,500 to 3,000 lb. Capacities
- Meets TMC Electrical Guidelines
- Snubber Kit
- Heavy-Duty Reinforced Spacer
- Pre-Mounted Pump and Cylinders
- Torsion Spring Assist

The THIEMAN MDC Series Stowaway is the industry standard for handling medium-duty loads.

Designed for fast and easy installation, the MDC25/30 includes a pre-assembled pump and cylinders. With the dual torsion spring assist, the operator can fold and unfold the platform with much less effort.

With its durable design and many standard features, the THIEMAN MDC Series is the choice among general purpose Stowaways.

Features, Benefits and Specifications

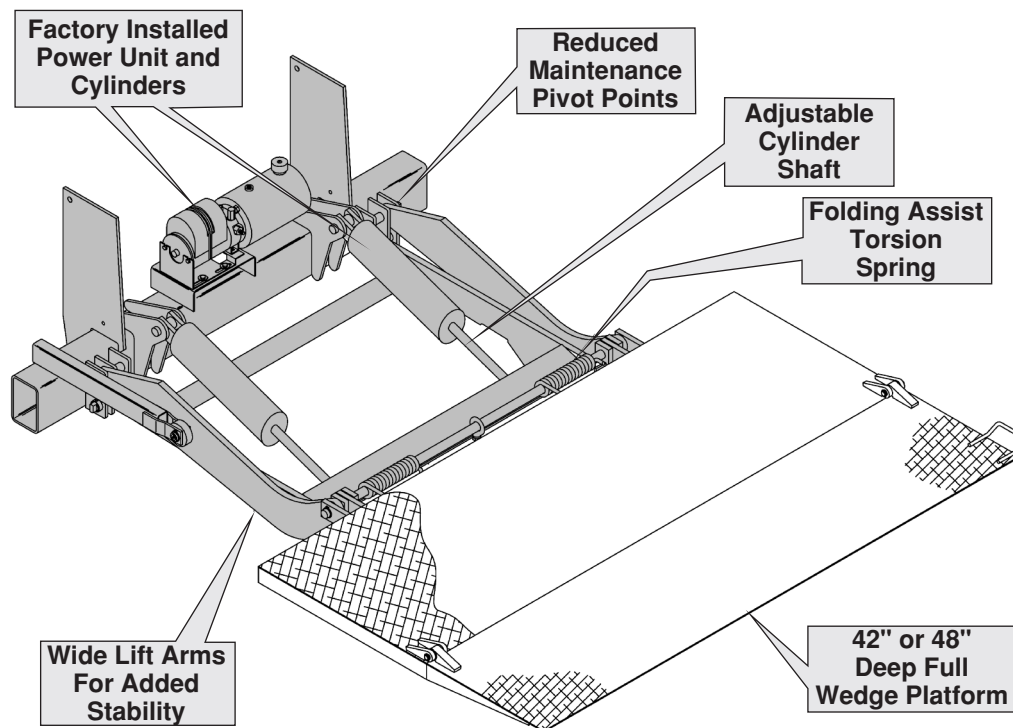

STANDARD FEATURES AND BENEFITS:

- | | |
|---|---|
| <ul style="list-style-type: none"> • Pre-Assembled Pump and Cylinders for Quick and Easy Installation. • Reduced Maintenance Bushings at All Major Pivot Points. • Molded Toggle Switch for Convenient Mounting and Protection. • 150 Amp Circuit Breaker for Electrical Protection. • Torsion Springs for Easy Platform Handling. | <ul style="list-style-type: none"> • Heavy-Duty Reinforced Spacer for Better Durability. • Standard Snubber Kit to Prevent Wear of Liftgate While in Traveling Position. • Meets All TMC Electrical Guidelines for Reduced Service Requirements. • Environmentally Sealed Toggle Switch Control for Better Dependability. |
|---|---|

AVAILABLE OPTIONS FOR MDC SERIES:

- | | | |
|---|--|--|
| <ul style="list-style-type: none"> • Remote Pendant Control • In-Cab Shut Off Switch • Push Button Control • Heavy-Duty I-Beam Dock Bumpers | <ul style="list-style-type: none"> • Light Kits • Trailer Kits • Aluminum Platform (AL) | <ul style="list-style-type: none"> • Power Down • Rubber Dock Bumpers • Power Unit Enclosures |
|---|--|--|

Model #	Platform	Load Capacity	Approx. Install Wt.	Bed Height Range
MDC30ET AL	72" or 84" x 40" + 6" (Alum)	3000 lbs.	905 or 925 lbs.	42" to 54"
MDC30ET	72" or 84" x 42" + 6"	3000 lbs.	1010 or 1045 lbs.	42" to 54"
MDC30ET	72" or 84" x 42" wedge	3000 lbs.	1000 or 1040 lbs.	45" to 54"
MDC30ET	72" or 84" x 42" + 10" Ret Ramp	3000 lbs.	1070 or 1080 lbs.	38" to 54"
MDC30ET AL	72" or 84" x 42" + 10" Ret Ramp(Alum)	3000 lbs.	910 or 935 lbs.	38" to 54"
MDC25ET	72" or 84" x 48" wedge (St/Alum)	2500 lbs.	975 or 990 lbs.	45" to 54"
MDC LB 25ET	72" or 84" x 48" wedge (St/Alum)	2500 lbs.	975 or 990 lbs.	38" to 45"
MDC25ET AL	72" or 84" x 48" wedge (Alum)	2500 lbs.	885 or 905 lbs.	45" to 54"
MDC LB 25ET AL	72" or 84" x 48" wedge (Alum)	2500 lbs.	885 or 905 lbs.	38" to 45"

Application: Van Bodies, Stake Bodies, and Trailers
ET- Electric with Toggle Switch Control/Gravity Down

Distributed By:

THIEMAN
TAILGATES INC.

Raising Performance to New Levels

600 East Wayne Street
 Celina, Ohio 45822
 Phone: 419-586-7727 or
 800-524-5210
 Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com

THIEMAN Reserves the right to Change Products
 Specifications at any time Without Prior Notice.
 Printed in U.S.A. Rev. 1/14 • 2M • MP80839


StowAway

Tailgates By THIEMAN


Raising Performance to New Levels

MLB-SERIES

Optional 38" Deep Wedge Platform

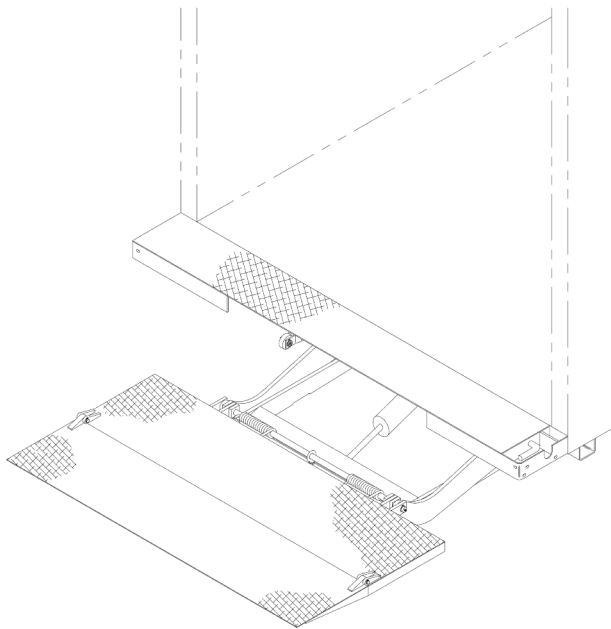

Standard 32+5" Deep Platform

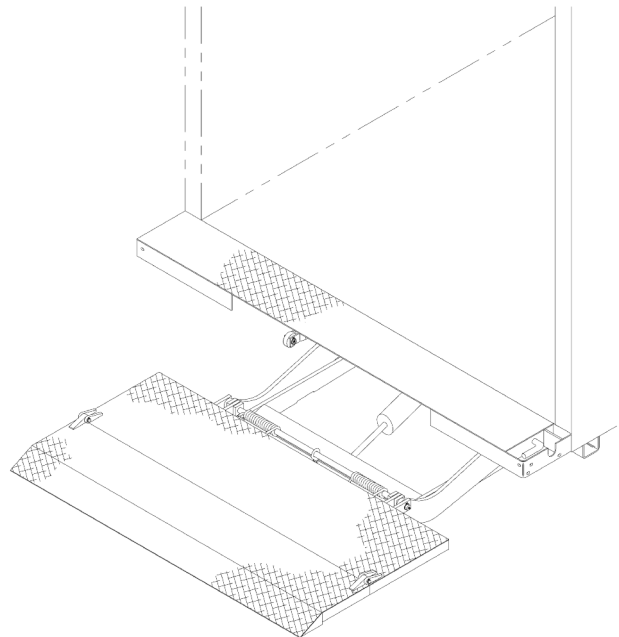

FEATURING:


- Reduced Maintenance Bushings
- Fast and Easy Installation
- 1,600 to 3,000 lb. Capacities
- Meets TMC Electrical Guidelines
- Snubber Kit
- Heavy-Duty Reinforced Spacer
- Pre-Mounted Pump and Cylinder
- Torsion Spring Assist

The THIEMAN MLB Series Stowaway is the industry standard for handling medium-duty loads on low bed height applications.

Designed for fast and easy installation, the MLB16/20/25/30 includes a pre-assembled pump and cylinder. With torsion spring assist, the operator can fold and unfold the platform with much less effort.

With its durable design and many standard features, the THIEMAN MLB Series is the choice among general purpose Stowaways.

Features, Benefits and Specifications

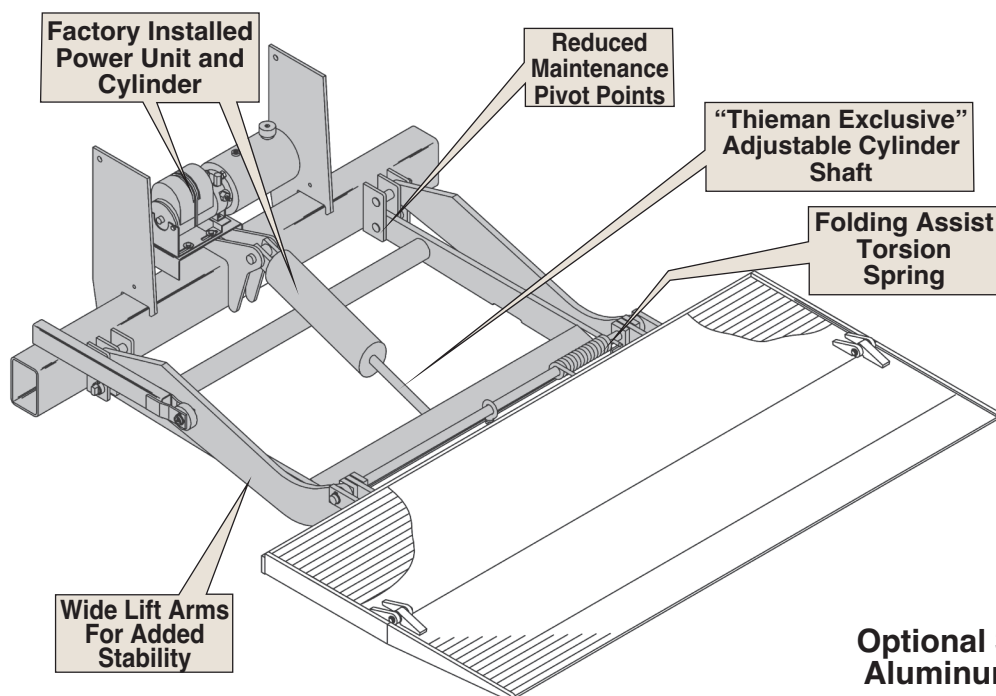

STANDARD FEATURES AND BENEFITS:

- Pre-Assembled Pump and Cylinder for Quick and Easy Installation.
- Reduced Maintenance Bushings at All Major Pivot Points.
- Molded Toggle Switch (Convenient Mounting and Environmentally Sealed)
- 150 Amp Circuit Breaker for Electrical Protection.
- Torsion Spring for Easy Platform Handling.
- Heavy-Duty Reinforced Spacer with Automatic Latch.
- Standard Snubber Kit to Prevent Wear of Liftgate While in Traveling Position.
- Meets All TMC Electrical Guidelines for Reduced Service Requirements.

AVAILABLE OPTIONS FOR MLB SERIES:

- In-Cab Shut Off Switch
- Heavy-Duty I-Beam Dock Bumpers
- Light Kits
- Power Down
- Power Unit Enclosures

Model #	Platform	Load Capacity	Approx. Install Wt.	Bed Height Range
MLB-16ET AL	72" or 84" x 27" + 6"	1600 lbs.	705 or 720 lbs.	34" to 40"
MLB-20ET AL	72" or 84" x 27" + 6"	2000 lbs.	705 or 720 lbs.	34" to 40"
MLB-25ET AL	72" or 84" x 27" + 6"	2500 lbs.	820 or 835 lbs.	34" to 40"
MLB-16ET	72" or 84" x 32" + 5"	1600 lbs.	780 or 815 lbs.	34" to 40"
MLB-20ET	72" or 84" x 32" + 5"	2000 lbs.	780 or 815 lbs.	34" to 40"
MLB-25ET	72" or 84" x 32" + 5"	2500 lbs.	895 or 930 lbs.	34" to 40"
MLB-30ET	72" or 84" x 32" + 5"	3000 lbs.	895 or 930 lbs.	34" to 40"
MLB-16ET AL	72" or 84" x 37" Wedge	1600 lbs.	688 or 703 lbs.	34" to 40"
MLB-20ET AL	72" or 84" x 37" Wedge	2000 lbs.	688 or 703 lbs.	34" to 40"
MLB-16ET	72" or 84" x 38" Wedge	1600 lbs.	800 or 818 lbs.	34" to 40"
MLB-20ET	72" or 84" x 38" Wedge	2000 lbs.	800 or 818 lbs.	34" to 40"

Application: Van Bodies, Stake Bodies, and Flatbeds
ET- Electric with Toggle Switch Control/Gravity Down
AL - Aluminum Platform

Distributed By:

THIEMAN
TAILGATES INC.
Raising Performance to New Levels

600 East Wayne Street
 Celina, Ohio 45822
 Phone: 419-586-7727 or
 800-524-5210
 Fax: 419-586-9724
 www.thieman.com
 info@thiemantailgates.com



THIEMAN Reserves the right to Change Products
 Specifications at any time Without Prior Notice.
 Printed in U.S.A. Rev. 1/19 • 1M • MP98551

StowAway

Tailgates By THIEMAN

Raising Performance to New Levels

MDC-SERIES

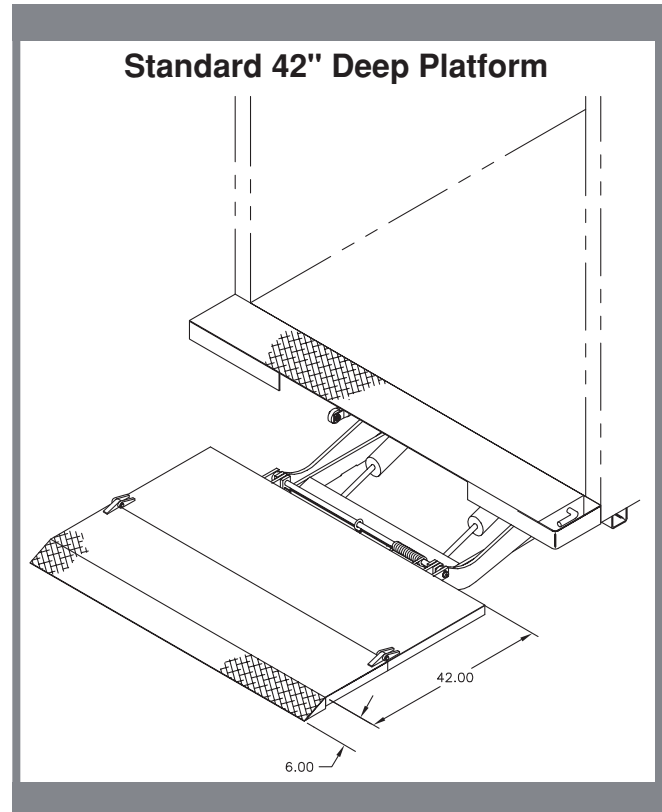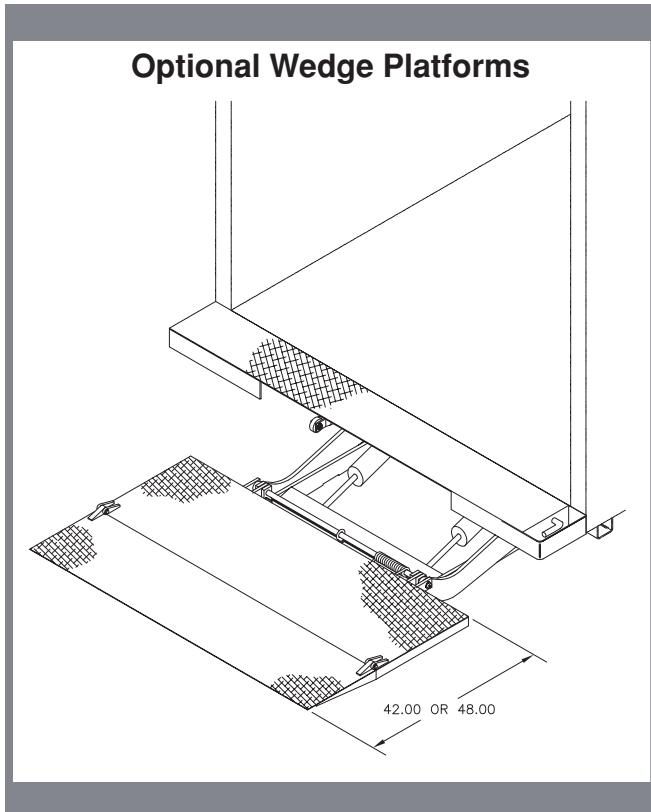

FEATURING:


- Reduced Maintenance Bushings
- Fast and Easy Installation
- 2,500 to 3,000 lb. Capacities
- Meets TMC Electrical Guidelines
- Snubber Kit
- Heavy-Duty Reinforced Spacer
- Pre-Mounted Pump and Cylinders
- Torsion Spring Assist

The THIEMAN MDC Series Stowaway is the industry standard for handling medium-duty loads.

Designed for fast and easy installation, the MDC25/30 includes a pre-assembled pump and cylinders. With the dual torsion spring assist, the operator can fold and unfold the platform with much less effort.

With its durable design and many standard features, the THIEMAN MDC Series is the choice among general purpose Stowaways.

Features, Benefits and Specifications

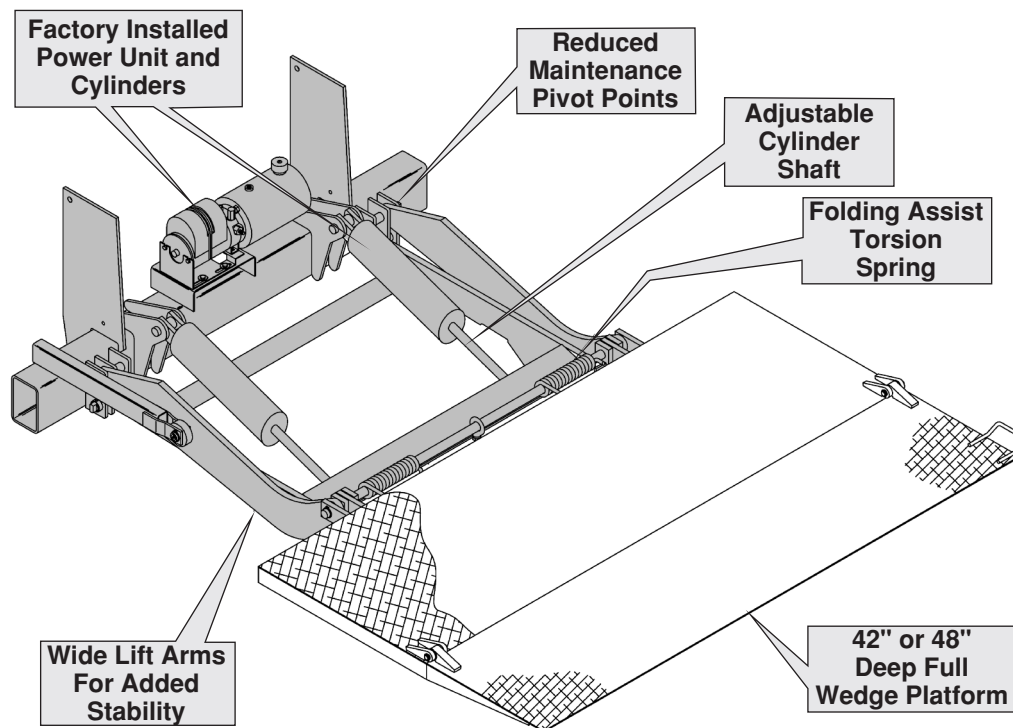

STANDARD FEATURES AND BENEFITS:

- | | |
|---|---|
| <ul style="list-style-type: none"> • Pre-Assembled Pump and Cylinders for Quick and Easy Installation. • Reduced Maintenance Bushings at All Major Pivot Points. • Molded Toggle Switch for Convenient Mounting and Protection. • 150 Amp Circuit Breaker for Electrical Protection. • Torsion Springs for Easy Platform Handling. | <ul style="list-style-type: none"> • Heavy-Duty Reinforced Spacer for Better Durability. • Standard Snubber Kit to Prevent Wear of Liftgate While in Traveling Position. • Meets All TMC Electrical Guidelines for Reduced Service Requirements. • Environmentally Sealed Toggle Switch Control for Better Dependability. |
|---|---|

AVAILABLE OPTIONS FOR MDC SERIES:

- | | | |
|---|--|--|
| <ul style="list-style-type: none"> • Remote Pendant Control • In-Cab Shut Off Switch • Push Button Control • Heavy-Duty I-Beam Dock Bumpers | <ul style="list-style-type: none"> • Light Kits • Trailer Kits • Aluminum Platform (AL) | <ul style="list-style-type: none"> • Power Down • Rubber Dock Bumpers • Power Unit Enclosures |
|---|--|--|

Model #	Platform	Load Capacity	Approx. Install Wt.	Bed Height Range
MDC30ET AL	72" or 84" x 40" + 6" (Alum)	3000 lbs.	905 or 925 lbs.	42" to 54"
MDC30ET	72" or 84" x 42" + 6"	3000 lbs.	1010 or 1045 lbs.	42" to 54"
MDC30ET	72" or 84" x 42" wedge	3000 lbs.	1000 or 1040 lbs.	45" to 54"
MDC30ET	72" or 84" x 42" + 10" Ret Ramp	3000 lbs.	1070 or 1080 lbs.	38" to 54"
MDC30ET AL	72" or 84" x 42" + 10" Ret Ramp(Alum)	3000 lbs.	910 or 935 lbs.	38" to 54"
MDC25ET	72" or 84" x 48" wedge (St/Alum)	2500 lbs.	975 or 990 lbs.	45" to 54"
MDC LB 25ET	72" or 84" x 48" wedge (St/Alum)	2500 lbs.	975 or 990 lbs.	38" to 45"
MDC25ET AL	72" or 84" x 48" wedge (Alum)	2500 lbs.	885 or 905 lbs.	45" to 54"
MDC LB 25ET AL	72" or 84" x 48" wedge (Alum)	2500 lbs.	885 or 905 lbs.	38" to 45"

Application: Van Bodies, Stake Bodies, and Trailers
ET- Electric with Toggle Switch Control/Gravity Down

Distributed By:

THIEMAN
TAILGATES INC.

Raising Performance to New Levels

600 East Wayne Street
 Celina, Ohio 45822
 Phone: 419-586-7727 or
 800-524-5210
 Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com

THIEMAN Reserves the right to Change Products
 Specifications at any time Without Prior Notice.
 Printed in U.S.A. Rev. 1/14 • 2M • MP80839


StowAway

Tailgates By THIEMAN


Raising Performance to New Levels

Model LRST-40

Platform in Loading/Unloading Position

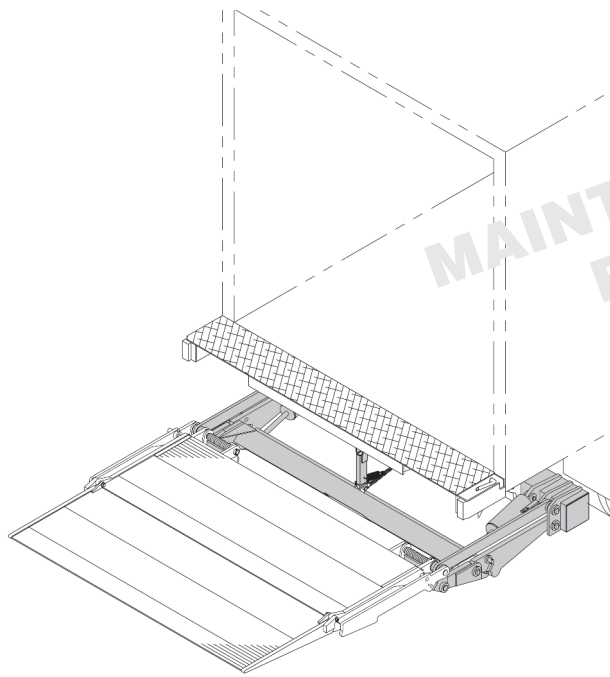

Platform in Travel Position

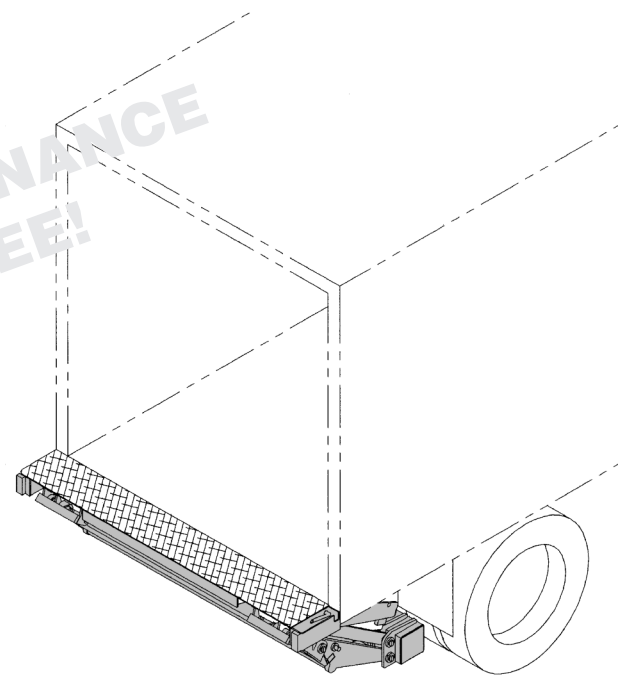

FEATURING:

- **Self-Leveling Action**
- **Large 80" x 60" Platform**
- **Heavy Duty Lift Frame**
- **4000 Lb. Lift Capacity**
- **Dual Cylinder Lift**
- **Maintenance-Free Bushings**
- **Pump Enclosure for Protection from Weather**
- **Meets TMC Electrical Guidelines**




The LRST (Level Ride Stowaway) is designed for handling loads of up to 4,000 lbs. and features a self-leveling action and an adjustable platform to provide a stable, "level with truck" surface for all types of loading conditions.

With maintenance being a major concern among fleets today, Thieman has incorporated self-lubricating Teflon bearings at all of the LRST pivot points. The LRST has a unique design so the cylinder rods are retracted during transit to protect them from road debris. The LRST also includes a standard plastic pump enclosure for protection from the weather. All of these features reduce the need for maintenance and keep your trucks and trailers on the road.

Along with a large 80" x 60" aluminum platform and self-lubricating bearings, is the industry's strongest lift frame. This makes the THIEMAN LRST the most efficient, reliable and durable Level Ride Stowaway in its class.

Features, Benefits and Specifications

Model LRST-40 Standard Features

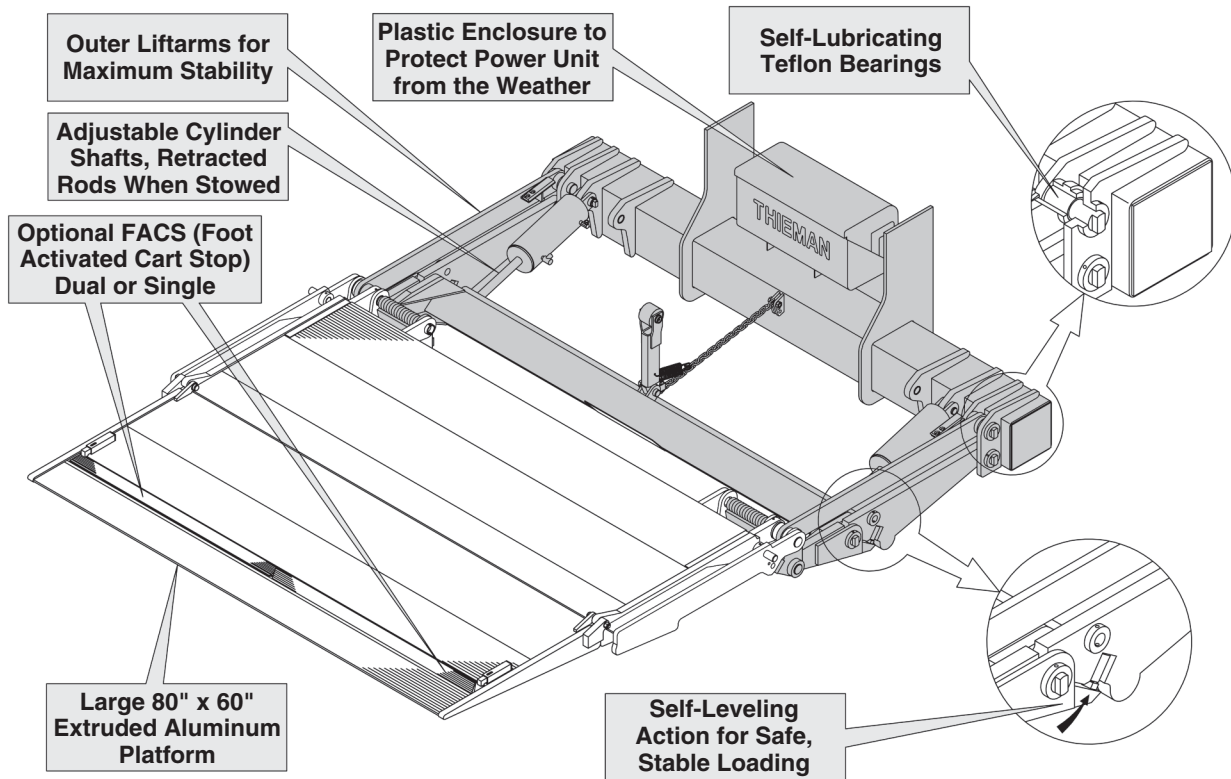

STANDARD FEATURES AND BENEFITS:

- | | | |
|--|---|---|
| <ul style="list-style-type: none"> • Self-Leveling Action to Provide Stable, "Level with Truck" Surface for All Types of Loads. • Teflon Composite Bearings Used with Stress-Proof Pins for Virtually Maintenance-Free Operation at Pivot Points. • No Lubrication Required at Pivot Points for Less Overall Maintenance. | <ul style="list-style-type: none"> • Dual Lift Cylinders for Maximum Stability. • Adjustable Cylinder Shafts for Adjusting Platform Height. • Adjustment Bolts for Adjusting Platform Angle. • Meets All TMC Electrical Guidelines for Reduced Service Requirements. • Power Up and Power Down for Better Cold Weather Operations. | <ul style="list-style-type: none"> • Plastic Pump Enclosure for Protection from Weather. • Sealed Toggle Switch Control for Easy Weather Proof Operation. • Dual Travel Latches to Secure Lift During Road Travel. • 150 Amp Circuit Breaker for Electrical Protection. • Snubber Kit for Reduced Movement While in Travel Position. |
|--|---|---|

AVAILABLE OPTIONS FOR LRST-40:

- | | | |
|--|--|--|
| <ul style="list-style-type: none"> • Remote Pendant Control • In-Cab Shut Off Switch • Heavy Duty I-Beam Dock Bumpers | <ul style="list-style-type: none"> • Rear Impact Guard (FMVSS 223) • Light Kits • Foot Activated Cart Stops | <ul style="list-style-type: none"> • Trailer Kits • PTO Power Source • Galvanized Undercarriage |
|--|--|--|

Model #	Platform	Ramp	Load Capacity	Lowering	Approx. Install Wt.	Bed Height Range
LRST 40 EST	80" X 60"	Full Taper	4000 Lbs.	Power	1450	46" to 56"
LRST 40 ESPB	80" X 60"	Full Taper	4000 Lbs.	Power	1450	46" to 56"

Application: Van Bodies, Trailers and Stake Bodies

EST-Electric w/Toggle Switch Control/Power Down *ESPB - Electric w/Push Button Control/Power Down

Distributed By:

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 5/10 • 2M • MP70077

THIEMAN
TAILGATES INC.
Raising Performance to New Levels

600 East Wayne Street
Celina, Ohio 45822
Phone: 419-586-7727 or
800-524-5210
Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com


StowAway

Tailgates By THIEMAN


Raising Performance to New Levels

M-SERIES

Optional 42" Deep Wedge Platform

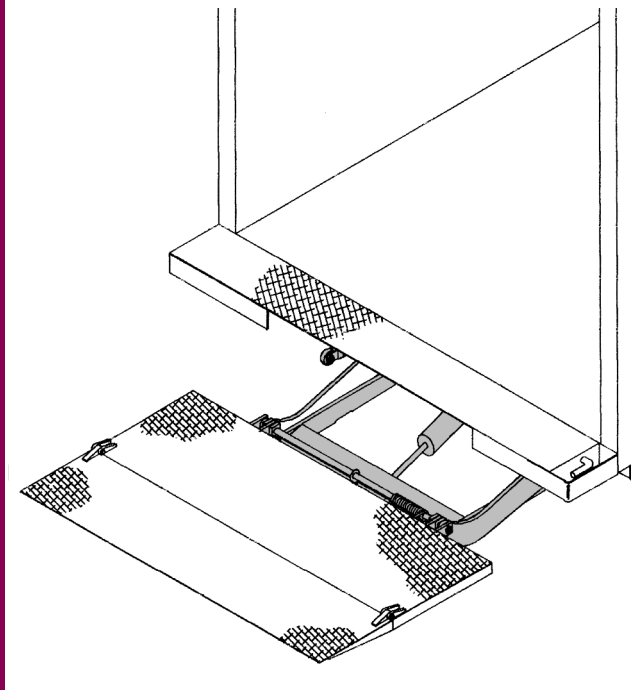

Standard 36" and
Now Available in 42" Deep Platform

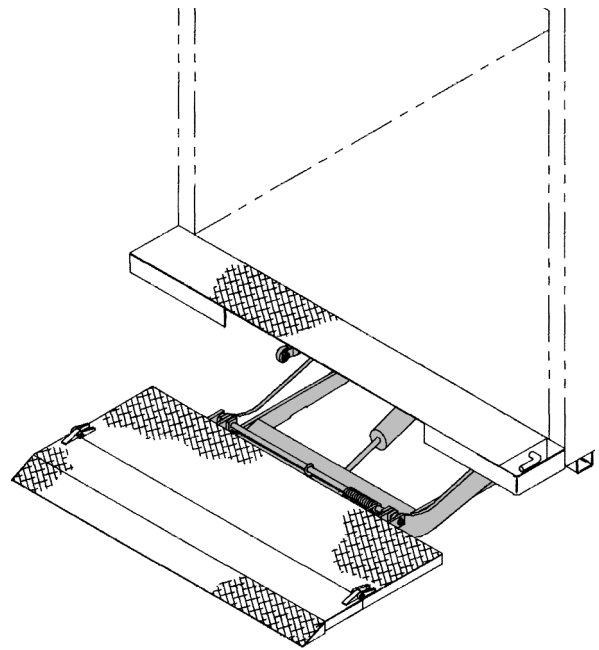

FEATURING:


- Reduced Maintenance Bushings
- Fast and Easy Installation
- 1,600 to 3,000 lb. Capacities
- Meets TMC Electrical Guidelines
- Snubber Kit
- Heavy-Duty Reinforced Spacer
- Pre-Mounted Pump and Cylinder
- Torsion Spring Assist

The THIEMAN M Series Stowaway is the industry standard for handling medium-duty loads.

Designed for fast and easy installation, the M16/20/25/30 includes a pre-assembled pump and cylinder. With the dual torsion spring assist, the operator can fold and unfold the platform with much less effort.

With its durable design and many standard features, the THIEMAN M Series is the choice among general purpose Stowaways.

Features, Benefits and Specifications

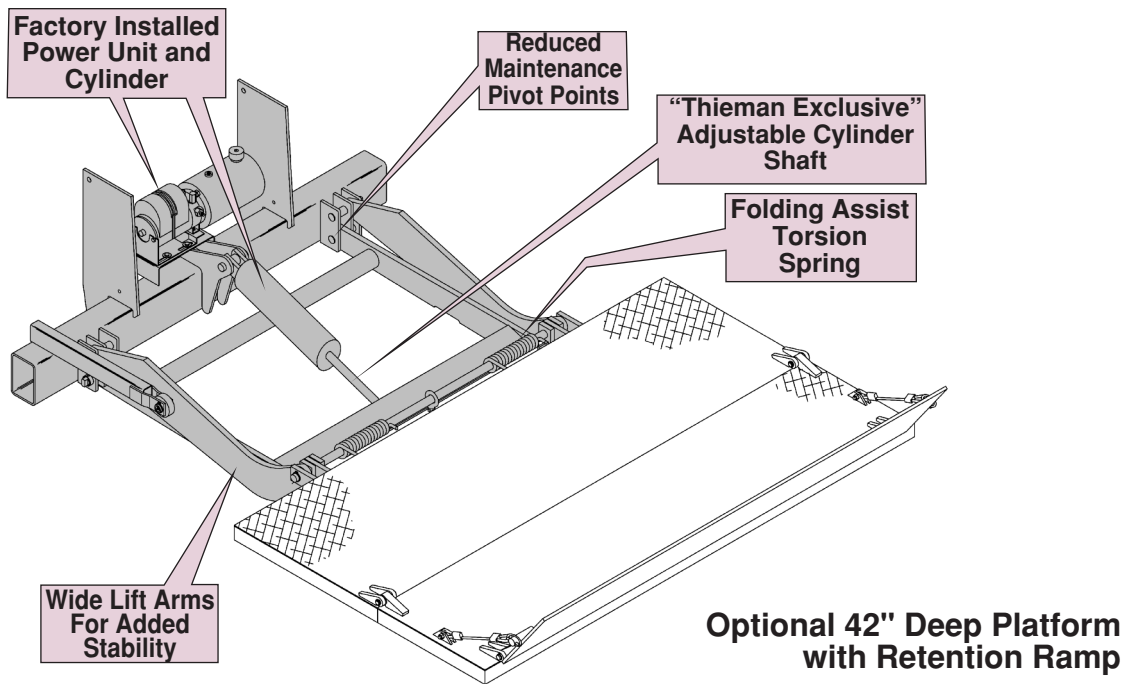

STANDARD FEATURES AND BENEFITS:

- Pre-Assembled Pump and Cylinder for Quick and Easy Installation.
- Reduced Maintenance Bushings at All Major Pivot Points.
- Molded Toggle Switch (Convenient Mounting and Environmentally Sealed)
- 150 Amp Circuit Breaker for Electrical Protection.
- Torsion Springs for Easy Platform Handling.
- Heavy-Duty Reinforced Spacer with Automatic Latch.
- Standard Snubber Kit to Prevent Wear of Liftgate While in Traveling Position.
- Meets All TMC Electrical Guidelines for Reduced Service Requirements.

AVAILABLE OPTIONS FOR M SERIES:

- Pintle Hitch Bracket
- Remote Pendant Control
- In-Cab Shut Off Switch
- Aluminum Platform (36+6, 40+6 Deep)
- Heavy-Duty I-Beam Dock Bumpers
- Light Kits
- Trailer Kits
- Power Down
- Power Unit Enclosures

Model #	Platform	Load Capacity	Approx. Install Wt.	Bed Height Range
M-16ET	72" or 84" x 36" + 6"	1600 lbs.	820 or 840 lbs.	37" to 54"
M-20ET	72" or 84" x 36" + 6"	2000 lbs.	820 or 840 lbs.	37" to 54"
M-25ET	72" or 84" x 36" + 6"	2500 lbs.	940 or 960 lbs.	38" to 54"
M-30ET	72" or 84" x 36" + 6"	3000 lbs.	940 or 960 lbs.	38" to 54"
M-16ET	72" or 84" x 42" + 6"	1600 lbs.	835 or 860 lbs.	42" to 54"
M-20ET	72" or 84" x 42" + 6"	2000 lbs.	835 or 860 lbs.	42" to 54"
M-25ET	72" or 84" x 42" + 6"	2500 lbs.	955 or 980 lbs.	42" to 54"
M-16ET	72" or 84" x 42" wedge	1600 lbs.	820 or 845 lbs.	45" to 54"
M-20ET	72" or 84" x 42" wedge	2000 lbs.	820 or 845 lbs.	45" to 54"
M-25ET	72" or 84" x 42" wedge	2500 lbs.	940 or 965 lbs.	45" to 54"
M-16ET	72" or 84" x 42" + 10" Ret Ramp	1600 lbs.	840 or 885 lbs.	37" to 54"
M-20ET	72" or 84" x 42" + 10" Ret Ramp	2000 lbs.	840 or 885 lbs.	37" to 54"
M-25ET	72" or 84" x 42" + 10" Ret Ramp	2500 lbs.	990 or 1035 lbs.	38" to 54"

Application: Van Bodies, Stake Bodies, and Trailers
ET- Electric with Toggle Switch Control/Gravity Down

Distributed By:

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice.
 Printed in U.S.A. Rev. 4/14 • 1M • MP81709

THIEMAN
TAILGATES INC.
Raising Performance to New Levels

600 East Wayne Street
 Celina, Ohio 45822
 Phone: 419-586-7727 or 800-524-5210
 Fax: 419-586-9724
www.thieman.com
info@thiemantailgates.com


SideLoader

Tailgates By THIEMAN


Raising Performance to New Levels

MODEL SL

Platform in Loading/Unloading Position

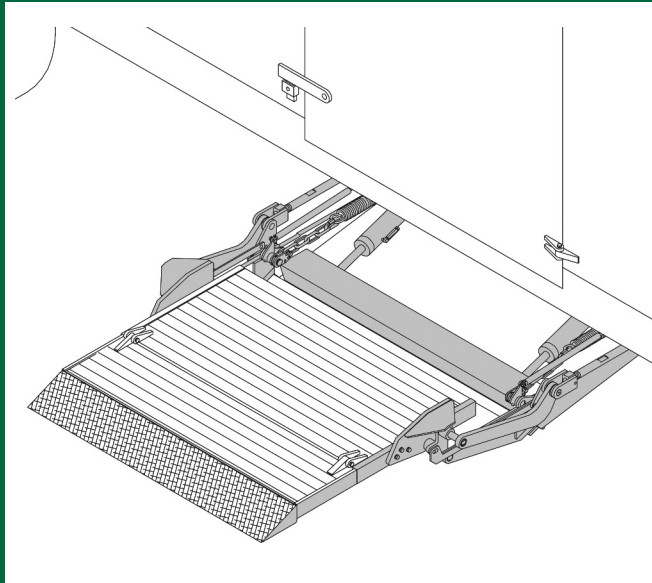

Platform in Travel Position

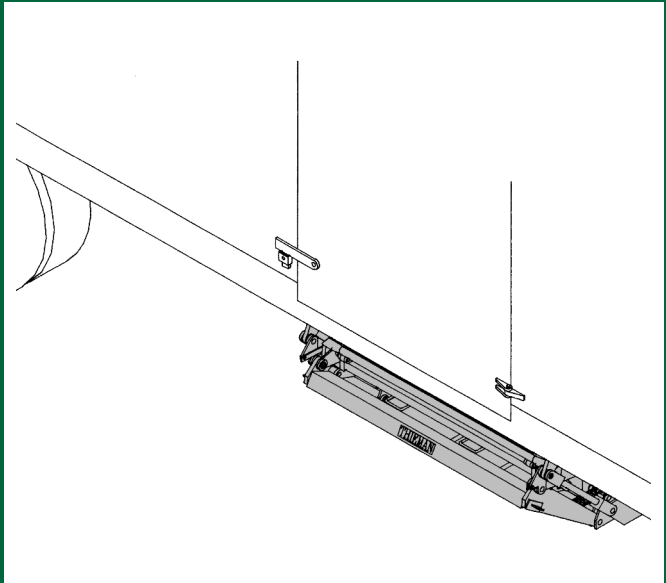

FEATURING:

- Meets TMC Electrical Guidelines
- 48" x 36" and 60" x 36" Extruded Aluminum Platform
- 1500 and 2000 lb. Lift Capacities
- Maintenance-Free Bearings
- Dual Folding Assist Springs
- Dual Cylinder Lift
- Up to 10" Rub Rail Clearance
- Sealed Toggle Switch Control
- Power Down Lowering of Platform
- Level Ride Platform


Designed for both truck bodies and trailers, the THIEMAN SL series is the most cost effective side-loading liftgate available.

With the use of a high-strength extruded aluminum platform and teflon composite bushings at major wear points, the THIEMAN sideloader's life expectancy is much longer than other models on the market.

If you're searching for a sideloader that is cost effective, built with strength and durability, and requires minimal maintenance, the THIEMAN SL is your answer.

Features, Benefits and Specifications

MODEL SL

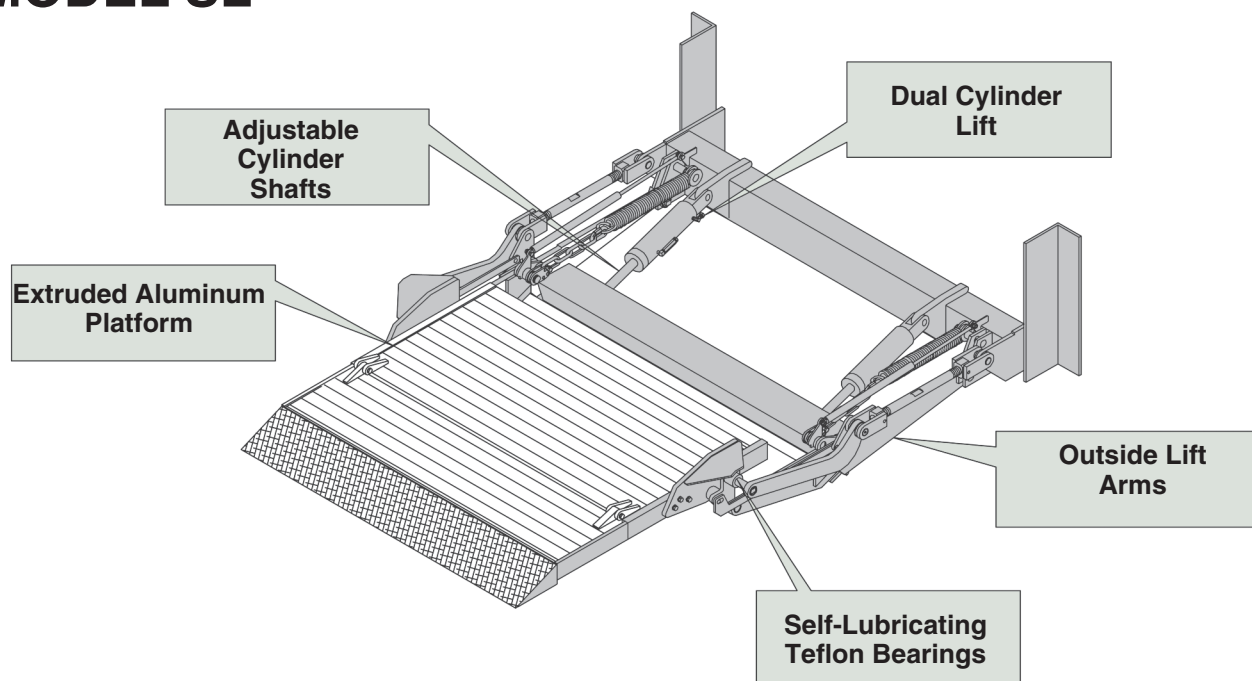

STANDARD FEATURES AND BENEFITS:

- Teflon Composite Bearings Used With Stress-Proof Pins for Virtually Maintenance-Free Operation at Main Pivot Points
- 150 Amp Circuit Breaker for Electrical Protection
- Dual Cylinder Lift for Maximum Stability
- Sealed Toggle Switch Control for Easy, Weather Proof Operation
- Outside Lift Arms for Maximum Platform Stability
- Extruded Aluminum Platform for Long Life, Reduced Weight, and Maximum Strength
- Adjustable Cylinder Shafts for Adjusting Platform Height
- Power Down for Better Cold Weather Operation
- Meets All TMC Guidelines for Reduced Service Requirements

AVAILABLE OPTIONS FOR SL SERIES:

- Remote Pendant Control
- In-Cab Shut Off Switch
- Automatic Cart Stop
- Push Button Control
- PTO Power Source
- Power Unit Enclosure
- Trailer Kits

MODEL NO.	PLATFORM	LOAD CAPACITY	LOWERING	INSTALL WEIGHT	BED HEIGHT RANGE
SL-15 EST-6	48" x 36"+8"	1500 lb.	Power	669 lb.	42" to 52"
SL-20 EST-6	48" x 36"+8"	2000 lb.	Power	674 lb.	42" to 52"
SL-15 EST-6	60" x 36"+8"	1500 lb.	Power	717 lb.	42" to 52"
SL-20 EST-6	60" x 36"+8"	2000 lb.	Power	722 lb.	42" to 52"
SL-15 EST-10	48" x 36"+8"	1500 lb.	Power	682 lb.	48" to 56"
SL-20 EST-10	48" x 36"+8"	2000 lb.	Power	687 lb.	48" to 56"
SL-15 EST-10	60" x 36"+8"	1500 lb.	Power	730 lb.	48" to 56"
SL-20 EST-10	60" x 36"+8"	2000 lb.	Power	735 lb.	48" to 56"

EST-Electric w/ Toggle Switch Control/Power Down
Application: Van Bodies, Stake Bodies, and Trailers

Distributed By:

THIEMAN
TAILGATES INC.
Raising Performance to New Levels

600 East Wayne Street
Celina, Ohio 45822
Phone: 419-586-7727 or
800-524-5210
Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com

THIEMAN Reserves the right to Change Products
Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 5/11 • 1M • MP73022